



Factory

Cuijia, Xidian Town, Ninghai, Ningbo,
China 315613
Tel: +86-574-65181812
+86-574-65171366
E-mail: info@yingjiao.com

Global Export Office

Dongcheng International, 155 Xinhui Road,
Ningbo, Zhejiang, China
Tel: +86-574-87563855
+86-574-87127889
E-mail: sales2@yingjiao.com


US Branch

Elwood IN 46036, USA
E-mail: us@yingjiao.com
www.yingjiao.us

EU Branch


Grumbkowstrasse 65A 13156 Berlin Germany
E-mail: sales-eu@yingjiao.com

www.yingjiao.com
www.yingjiaodriver.com

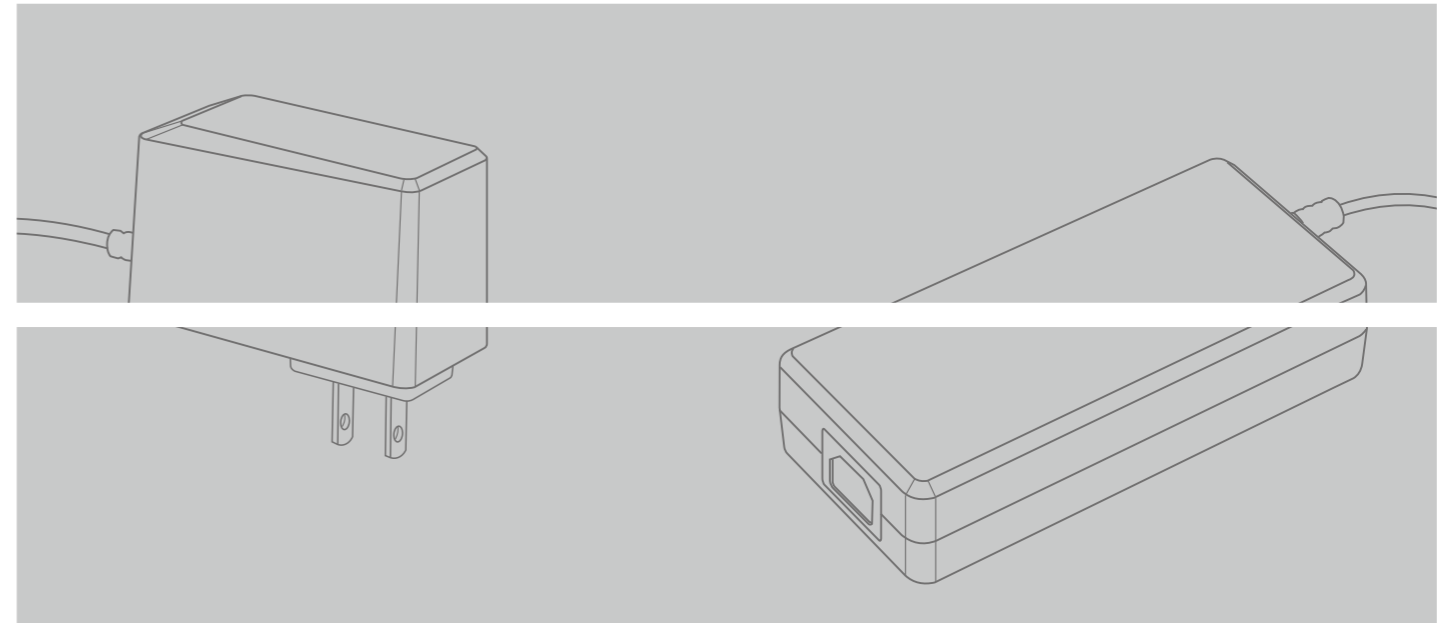

Experts in Power Adapters
and Chargers

Catalogue 2024

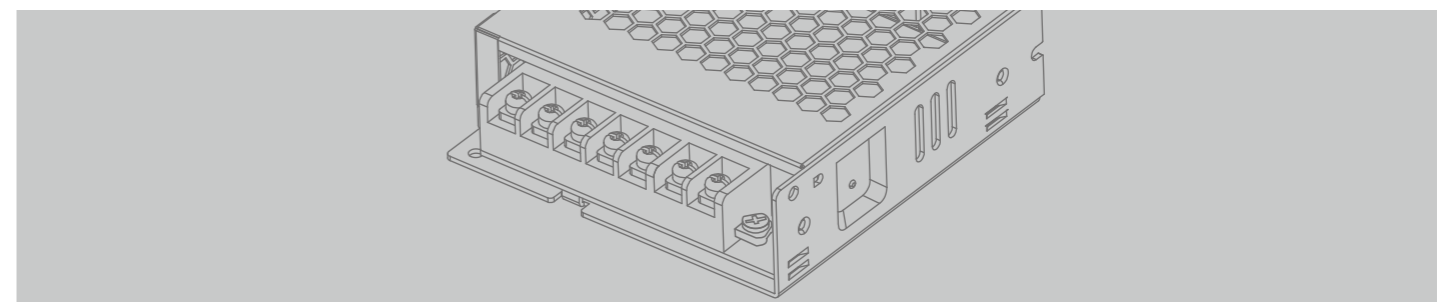

Index

- 01** Switching Power Adapters / Chargers
- 31** Battery Chargers
- 36** Universal Power Adapters
- 42** Power Supply Module
- 46** CCTV Power Supplies
- 48** Enclosed Power Supplies
- 52** Low Profile Enclosed Power Supplies
- 56** Waterproof Power Supplies
- 59** CATV Power Adapters
- 66** USB Chargers
- 69** PoE Power Adapters
- 71** Linear Power Adapters
- 79** Car Chargers
- 81** Open-Frame Power Modules
- 82** Toroidal Transformers
- 83** Transformers
- 84** High Frequency Transformers
- 85** AC Power Cords
- 86** DC Connectors / Plugs

Introduction

Yingjiao Electrical Co.,Ltd. was established in 1995 and is dedicated to the design and development of all types of low voltage power adapters, LED drivers, utilizing scaled manufacturing and global sales to fully serve the world's electronic and electric industries. The core products include switching & linear power adapters, battery chargers, transformers, DIN rail power supply, enclosed power supplies, medical power supplies, LED drivers and completely customizable power solutions, designed for use in telecommunications, IT equipment, consumer electronic devices, security system, automation, medical equipments, smart home, LED lights and much more.

Yingjiao committed to total quality management through continuing improvement processes, including derating & reliability analytics testing, MTBF procedures are an integral part of our research and development, with quality assurance management in support of ISO9001, ISO14001 quality systems ensure that Yingjiao consistently offers the highest quality products for our customers.


Yingjiao products comply with RoHS, PAHS, REACH and WEEE standards, Achieve CoCV5 and DoE VI of efficiency level, obtained and maintained UL, cUL, FCC, TUV-GS, CB, CSA, PSE, RCM, KC, EAC, CE, EMC and CCC safety certificates.

In addition to our full line of products, Yingjiao is able to offer complete ODM/OEM product development to meet the individual requirements of our business partners.

Yingjiao is committed to becoming your premier power supply partner. With unsurpassed customer service and professionalism, Yingjiao is uniquely suited to deliver market leading power supplies and LED drivers to meet your own specific requirements.



International Authoritative Certifications

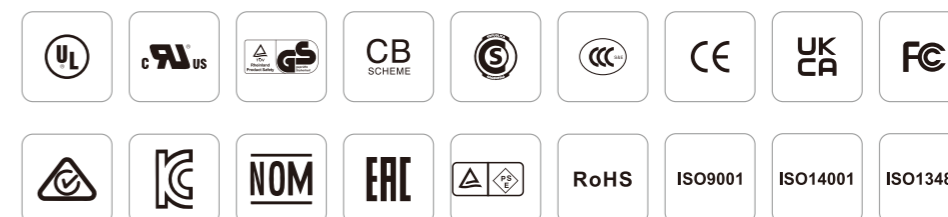

Model: YS400




Rated Power: 400W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.5W
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP, OTP
Output: 21-84V

Output Voltage (DC)	25.2V	29.2V	36V	42V	54.6V	67.2V	84V
Output Current	15A	13A	10A	9A	6.5A	5.5A	4.5A

Safety Standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335, IEC / EN60601
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013

Dimensions: (mm)

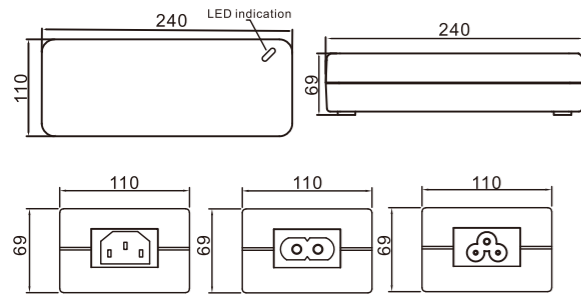

Model: YS200




Rated Power: 250W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.5W
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP, OTP
Output: 12-48V

Output Voltage (DC)	12V	15V	19V	24V	36V	48V
Output Current (max.)	17A	15A	12.5A	10.4A	6.9A	5.2A

Safety Standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335, IEC / EN60601
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013

Dimensions: (mm)

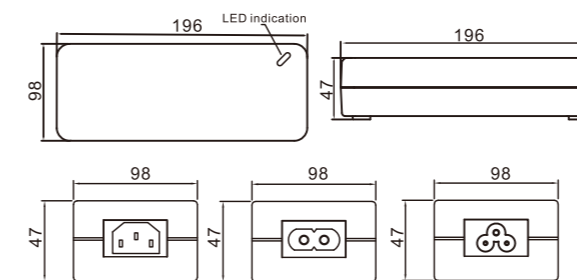

Model: YS300




Rated Power: 350W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.5W
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP, OTP
Output: 12-48V

Output Voltage (DC)	12V	15V	19V	24V	36V	48V
Output Current	25A	21A	18A	14.58A	9.7A	7.29A

Safety Standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335, IEC / EN60601
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013

Dimensions: (mm)

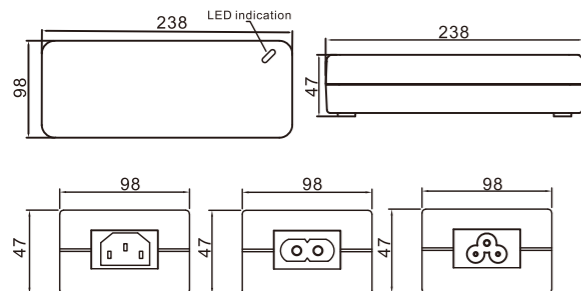

Model: YS150




Rated Power: 200W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.21W
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP, OTP
Output: 12-48V

Output Voltage (DC)	12V	15V	19V	24V	36V	48V
Output Current (max.)	15A	12A	10.5A	8.3A	5.5A	4.16A

Safety Standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335, IEC / EN60601
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013

Dimensions: (mm)

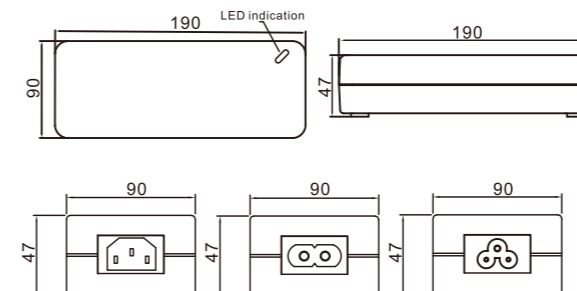


Model: YS125



Rated Power: 150W
Input: 100-240V AC, 50/60Hz
Standby Power: ≤0.21W
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP, OTP
Output: 9-48V

Output Voltage (DC)	9V	12V	15V	19V	24V	48V
Output Current (max.)	15A	12.5A	10A	7.8A	6.25A	3.12A

Dimensions: (mm)

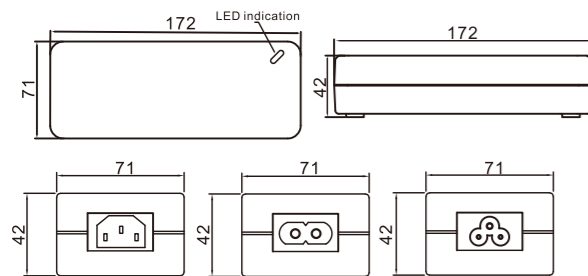

Safety Standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335, IEC / EN60601
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013


Model: YS120



Rated Power: 150W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.21W
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP, OTP
Output: 9-48V

Output Voltage (DC)	9V	12V	15V	19V	24V	48V
Output Current (max.)	15A	12.5A	10A	7.8A	6.25A	3.12A

Dimensions: (mm)

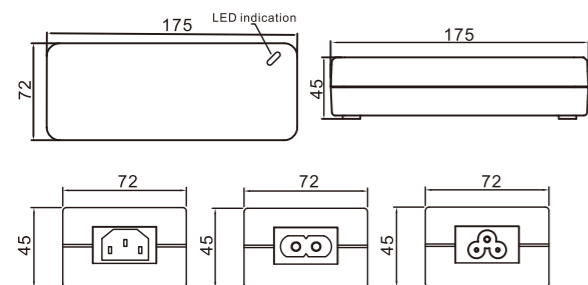

Safety Standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335, IEC / EN60601
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013


Model: YS100



Rated Power: 100W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.21W
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP, OTP
Output: 9-48V

Output Voltage (DC)	9V	12V	15V	19V	24V	48V
Output Current (max.)	10A	8.3A	6.67A	5.26A	4.5A	2.25A

Dimensions: (mm)

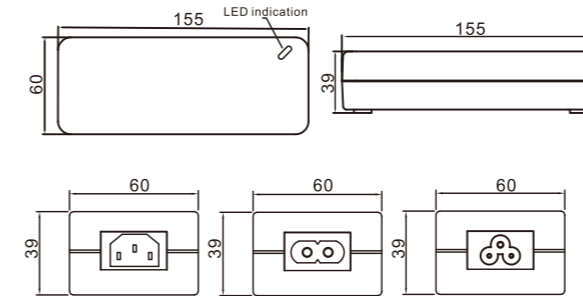

Safety Standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335, IEC / EN60601
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013


Model: YS90



Rated Power: 90W
Input: 100-240VAC, 50 / 60Hz
Standby Power: ≤0.21W
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP
Output: 5-48V

Output Voltage (DC)	5V	12V	15V	19V	24V	48V
Output Current (max.)	10A	7.5A	6A	4.74A	3.75A	2A
Output Voltage (DC)	5V	9V	12V	15V	20V	
Output Current (max.)	3A	3A	3A	3A	4.5A	

Dimensions: (mm)

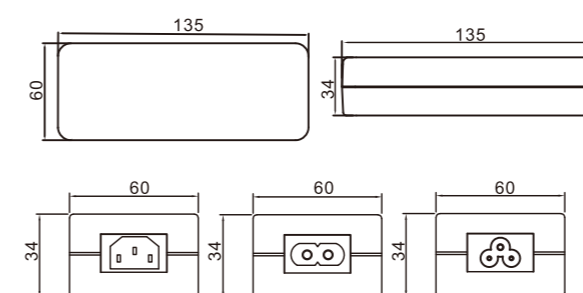

Safety Standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335, IEC / EN60601
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013


Model: YS80



Rated Power: 90W
Input: 100-240V AC, 50 / 60Hz
Standby Power: $\leq 0.21W$
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP
Output: 5-48V

Output Voltage (DC)	5V	12V	15V	19V	24V	48V
Output Current (max.)	10A	7.5A	6A	4.74A	3.75A	2A

Dimensions: (mm)

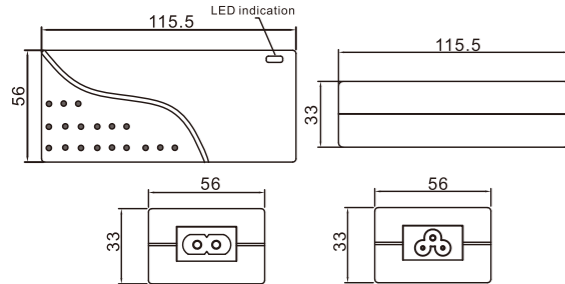

Safety Standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335, IEC / EN60601
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1:2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013


Model: YS50 (PD Charger)



Rated Power: 65W
Input: 100-240V AC, 50 / 60Hz
Standby Power: $\leq 0.21W$
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP
Output: 5-48V

Output Voltage (DC)	5V	9V	12V	15V	19V	24V	48V
Output Current (max.)	6A	5A	5.4A	4.3A	3.42A	2.7A	1.35A
PD Output Voltage (DC)	5V	9V	12V	15V	20V		
PD Output Current (max.)	3A	3A	3A	3A	3.25A		

Dimensions: (mm)

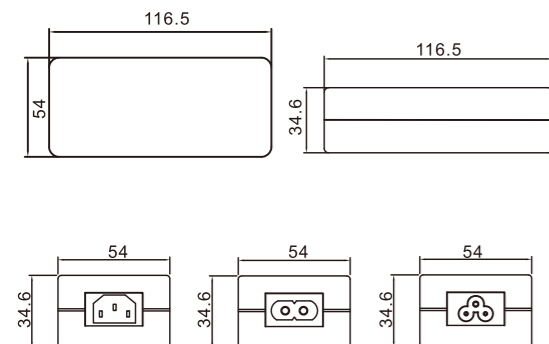

Safety Standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335, IEC / EN60601
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013


Model: YS50(With Mounting Brackets)



Rated Power: 65W
Input: 100-240V AC, 50 / 60Hz
Standby Power: $\leq 0.21W$
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP
Output: 5-48V

Output Voltage (DC)	5V	9V	12V	15V	19V	24V	48V
Output Current (max.)	6A	5A	5.4A	4.3A	3.42A	2.7A	1.35A

Dimensions: (mm)

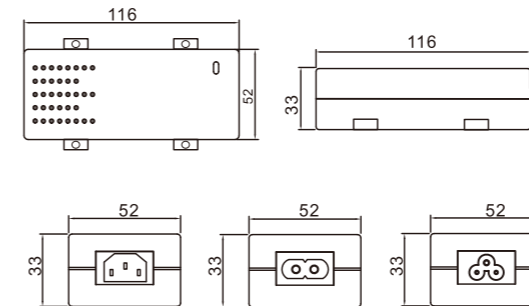

Safety standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335, IEC / EN60601
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013


Model: YS50 (With AC Cord)



Rated Power: 65W
Input: 100-240V AC, 50 / 60Hz
Standby Power: $\leq 0.21W$
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP
Output: 5-48V

Output Voltage (DC)	5V	9V	12V	15V	19V	24V	48V
Output Current (max.)	6A	5A	5A	4A	3.16A	2.5A	1.25A

Dimensions: (mm)

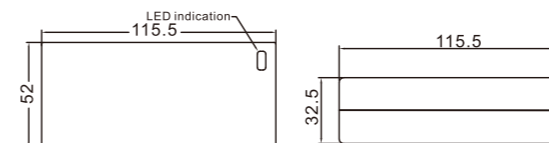

Safety Standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335, IEC / EN60601
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013


Model: YS28 (With AC Cord)



Rated Power: 30W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.1W
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP
Output: 5-36V

Output Voltage (DC)	5V	7V	9V	12V	18V	24V	36V
Output Current (max.)	4A	3A	3A	2.5A	1.66A	1.2A	0.8A

Dimensions: (mm)

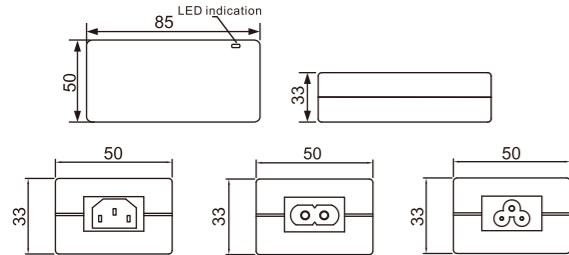

Safety Standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335, IEC / EN60601
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013


Model: YS25 (With Mounting Brackets)



Rated Power: 48W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.1W
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP
Output: 5-48V

Output Voltage (DC)	5V	9V	12V	15V	24V	36V	48V
Output Current (max.)	5A	5A	4A	3.2A	2A	1.34A	1A

Dimensions: (mm)

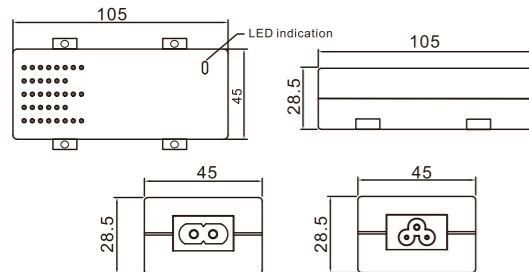

Safety Standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335, IEC / EN60601
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013


Model: YS25 (PD Charger)



Rated Power: 48W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.1W
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP
Output: 5-48V

Output Voltage (DC)	5V	9V	12V	15V	24V	36V	48V
Output Current (max.)	5A	5A	4A	3.2A	2A	1.34A	1A
PD Output Voltage (DC)	5V	9V	12V	15V	20V		
PD Output Current (max.)	3A	3A	3A	3A	2.25A		

Dimensions: (mm)

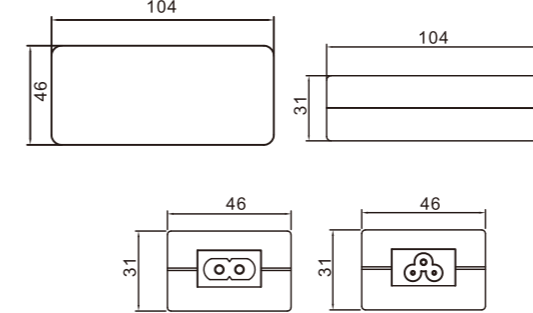

Safety Standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335, IEC / EN60601
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013


Model: YS25 (With AC Cord)



Rated Power: 48W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.1W
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP
Output: 5-48V

Output Voltage (DC)	5V	9V	12V	15V	24V	36V	48V
Output Current (max.)	5A	5A	4A	3.2A	2A	1.34A	1A

Dimensions: (mm)

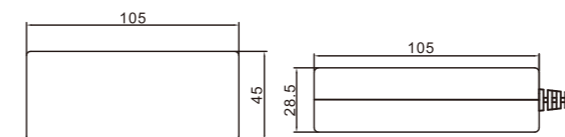

Safety Standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335, IEC / EN60601
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013


Model: YS24



Rated Power: 30W
Input: 100-240V AC, 50/60Hz
Standby Power: $\leq 0.1W$
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP
Output: 5-36V

Output Voltage (DC)	5V	9V	12V	15V	18V	24V	36V
Output Current (max.)	4A	3.3A	2.5A	2A	1.67A	1.25A	0.83A

Dimensions: (mm)

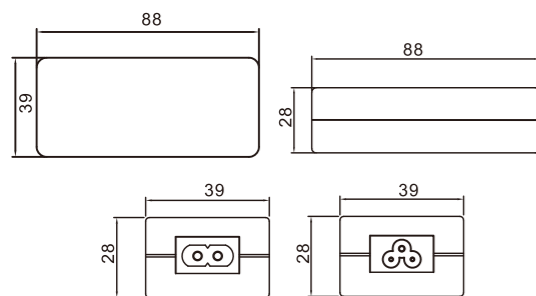

Safety Standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335,
IEC / EN60601, IEC / EN61347
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1:2 015
EN 61000-3-2: 2014
EN 61000-3-3: 2013
EN 55015: 2013+A1: 2015
EN 61547: 2009


Model: YS11 (With AC Cord)



Rated Power: 12W
Input: 100-240V AC, 50 / 60Hz
Standby Power: $\leq 0.1W$
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP
Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	15V	24V	36V
Output Current (max.)	2A	2A	1.5A	1.3A	1A	0.8A	0.5A	0.35A

Dimensions: (mm)

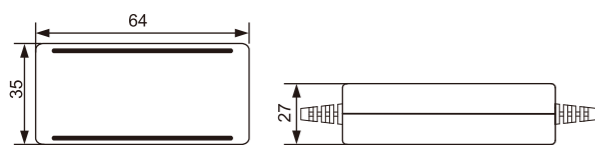

Safety Standard:

UL62368, UL1310, UL1012, UL60601
IEC / EN62368, IEC / EN61558, IEC / EN60335, IEC/EN60601, IEC / EN61347
FCC PART15 CLASS B
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013
EN 55015: 2013+A1: 2015
EN 61547: 2009


Model: YS35V-E



Rated Power: 60W
Input: 100-240V AC, 50 / 60Hz
Standby Power: $\leq 0.21W$
Efficiency Level: DOE VI
Protection: Short circuit, OCP, OVP
Output: 5-48V

Output Voltage (DC)	5V	9V	12V	18V	24V	36V	48V
Output Current (max.)	5A	5A	5A	3.3A	2.5A	1.66A	1.25A

Dimensions: (mm)

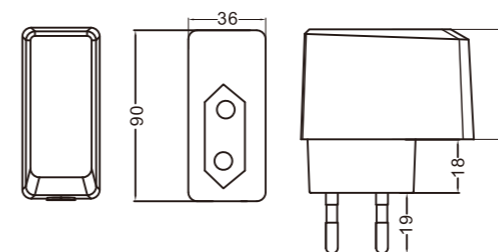

Safety Standard:

UL62368-1, CAN / CSA-C22.2
UL1310, CAN / CSA- C22.2
UL60601-1, CAN / CSA-C22.2
FCC PART 15 CLASS B


Model: YS35V-U



Rated Power: 60W
Input: 100-240V AC, 50 / 60Hz
Standby Power: $\leq 0.21W$
Efficiency Level: DOE VI
Protection: Short circuit, OCP, OVP
Output: 5-48V

Output Voltage (DC)	5V	9V	12V	18V	24V	36V	48V
Output Current (max.)	5A	5A	5A	3.3A	2.5A	1.66A	1.25A

Dimensions: (mm)

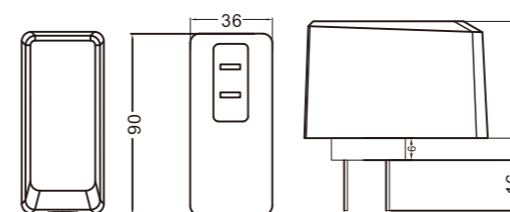

Safety Standard:

UL62368-1, CAN/CSA-C22.2
UL1310, CAN/CSA-C22.2
UL60601-1, CAN / CSA-C22.2
FCC PART 15 CLASS B

Switching Power Adapters

YS18V Series


Model: YS18V-E



Rated Power: 30W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	7V	9V	12V	18V	24V	36V
Output Current (max.)	3.5A	3.5A	3.3A	2.5A	1.6A	1.25A	0.8A

Dimensions: (mm)

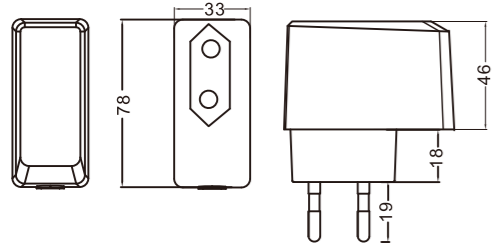

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 610000-3-2: 2014
 IEC / EN60601, IEC / EN61347 EN 61000-3-3: 2013
 EN 55032: 2015 EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015 EN 61547: 2009


Model: YS18V-U



Rated Power: 30W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: DOE VI
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	7V	9V	12V	18V	24V	36V
Output Current (max.)	3.5A	3.5A	3.3A	2.5A	1.6A	1.25A	0.8A

Dimensions: (mm)

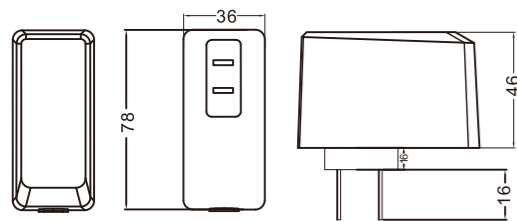

Safety Standard:

UL623681-1, CAN / CSA-C22.2
 UL1310, CAN / CSA-C22.2
 UL60601-1, CAN / CSA-C22.2
 FCC PART 15 CLASS B

Switching Power Adapters

YS16V Series


Model: YS16V-E



Rated Power: 18W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	24V	36V
Output Current (max.)	3A	2.5A	2A	1.5A	1.2A	0.75A	0.5A

Dimensions: (mm)

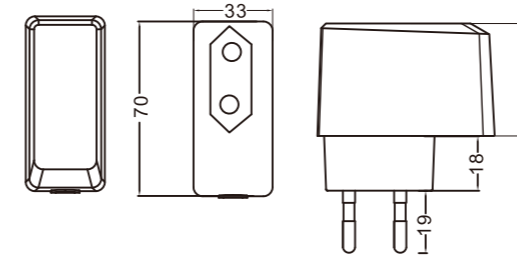

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 610000-3-2: 2014
 IEC / EN60601, IEC / EN61347 EN 61000-3-3: 2013
 EN 55032: 2015 EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015 EN 61547: 2009


Model: YS16V-U



Rated Power: 18W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: DOE VI
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	24V	36V
Output Current (max.)	3A	2.5A	2A	1.67A	1.25A	0.75A	0.5A

Dimensions: (mm)

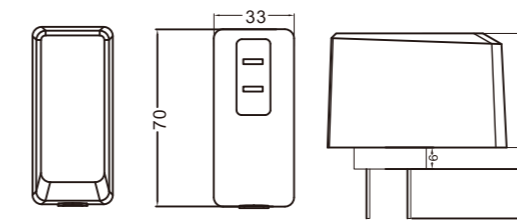

Safety Standard:

UL623681-1, CAN / CSA-C22.2
 UL1310, CAN / CSA-C22.2
 UL60601-1, CAN / CSA-C22.2
 FCC PART 15 CLASS B

Switching Power Adapters

YS12V Series


Model: YS12V-E



Rated Power: 12W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	15V	24V	36V
Output Current (max.)	2A	2A	1.5A	1.3A	1A	0.8A	0.5A	0.25A

Dimensions: (mm)

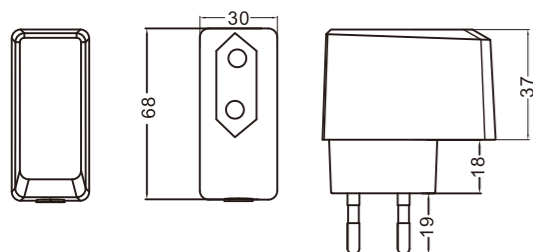

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC/EN60335, EN 610000-3-2: 2014
 IEC / EN60601, IEC / EN61347, EN 61000-3-3: 2013
 EN 55032: 2015, EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015, EN 61547: 2009


Model: YS12V-U



Rated Power: 12W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: DOE VI
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	15V	24V
Output Current (max.)	2.4A	2A	1.5A	1.3A	1A	0.8A	0.5A

Dimensions: (mm)

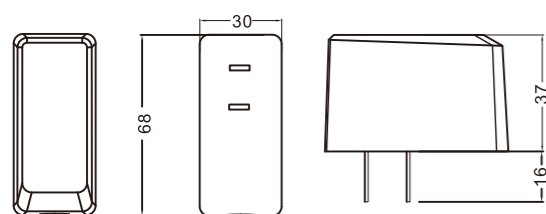

Safety standard:

UL623681-1, CAN / CSA-C22.2
 UL1310, CAN / CSA- C22.2
 UL60601-1, CAN / CSA-C22.2
 FCC PART 15 CLASS B

Switching Power Adapters

YS6V Series


Model: YS6V-E



Rated Power: 6W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	24V	36V
Output Current (max.)	1A	1A	0.8A	0.6A	0.5A	0.25A	0.18A

Dimensions: (mm)

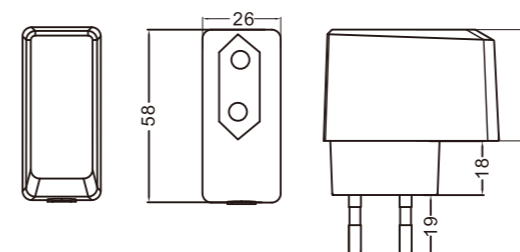

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 610000-3-2: 2014
 IEC / EN60601, IEC / EN61347, EN 61000-3-3: 2013
 EN 55032: 2015, EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015, EN 61547: 2009


Model: YS6V-U



Rated Power: 6W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: DOE VI
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	24V
Output Current (max.)	1.2A	1A	0.8A	0.66A	0.5A	0.25A

Dimensions: (mm)

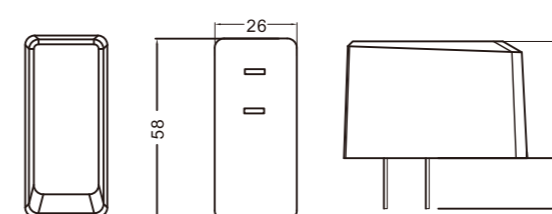

Safety Standard:

UL623681-1, CAN / CSA-C22.2
 UL1310, CAN / CSA- C22.2
 UL60601-1, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YS39E



Rated Power: 60W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.21W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-48V

Output Voltage (DC)	5V	9V	12V	18V	24V	36V	48V
Output Current (max.)	5A	5A	5A	3.33A	2.5A	1.66A	1.25A

Dimensions: (mm)

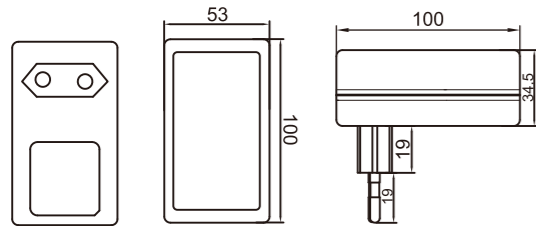

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 610000-3-2: 2014
 IEC / EN60601, IEC / EN61347 EN 61000-3-3: 2013
 EN 55032: 2015 EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015 EN 61547: 2009


Model: YS39A



Rated Power: 60W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.21W
 Efficiency Level: DOE VI
 Protection: Short circuit, OCP, OVP
 Output: 5-48V

Output Voltage (DC)	5V	9V	12V	18V	24V	36V	48V
Output Current (max.)	5A	5A	5A	3.3A	2.5A	1.66A	1.25A

Dimensions: (mm)

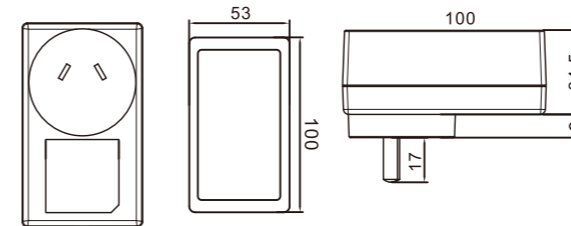

Safety Standard:

UL623681-1, CAN / CSA-C22.2
 UL1310, CAN / CSA- C22.2
 UL60601-1, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YS39U



Rated Power: 60W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.21W
 Efficiency Level: DOE VI
 Protection: Short circuit, OCP, OVP
 Output: 5-48V

Output Voltage (DC)	5V	9V	12V	18V	24V	36V	48V
Output Current (max.)	5A	5A	5A	3.3A	2.5A	1.66A	1.25A

Dimensions: (mm)

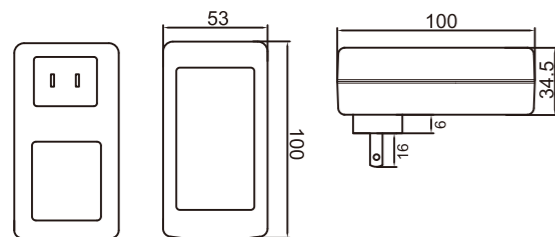

Safety Standard:

UL623681-1, CAN / CSA-C22.2
 UL1310, CAN / CSA- C22.2
 UL60601-1, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YS35E



Rated Power: 48W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	7V	9V	12V	18V	24V	36V
Output Current (max.)	4A	4A	4A	4A	2.67A	2A	1.33A

Dimensions: (mm)

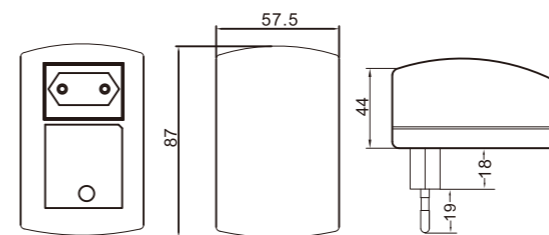

Safety Standard:

IEC/EN62368, IEC / EN61558, EN 610000-3-2: 2014
 IEC/EN60335, IEC / EN60601, IEC / EN61347 EN 61000-3-3: 2013
 EN 55032: 2015 EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015 EN 61547: 2009


Model: YS35U



Rated Power: 48W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: DOE VI
 Protection: Short circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	7V	9V	12V	18V	24V	36V
Output Current (max.)	4A	4A	4A	4A	2.67A	2A	1.33A

Dimensions: (mm)

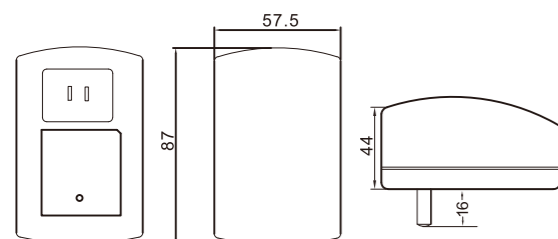

Safety Standard:

UL623681-1, CAN / CSA-C22.2
 UL1310, CAN / CSA-C22.2
 UL60601-1, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YS35A



Rated Power: 48W
 Input: 100-240VAC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: MEPS
 Protection: Short circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	7V	9V	12V	18V	24V	36V
Output Current (max.)	4A	4A	4A	4A	2.67A	2A	1.33A

Dimensions: (mm)

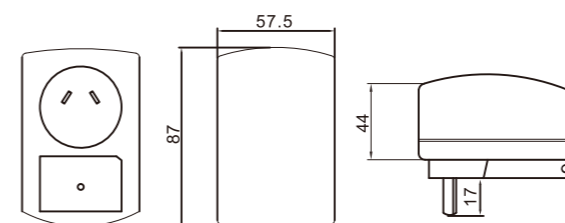

Safety Standard:

AS / NZS 61558.2.16: 2010
 AS / NZS 61558.1: 2008
 AS 61347.2.13: 2018
 AS / NZS 3112: 2017


Model: YS35B



Rated Power: 48W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	7V	9V	12V	18V	24V	36V
Output Current (max.)	4A	4A	4A	4A	2.67A	2A	1.33A

Dimensions: (mm)

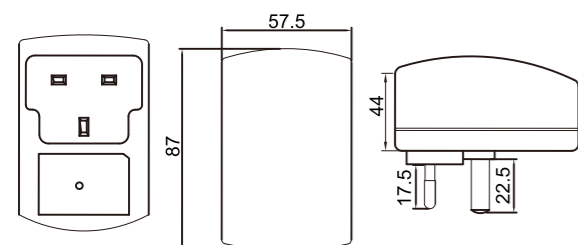

Safety Standard:

IEC / EN62368, IEC / EN61558, EN 610000-3-2: 2014
 IEC / EN60335, IEC / EN60601, IEC / EN61347 EN 61000-3-3: 2013
 EN 55032:2015 EN 55015: 2013+A1: 2015
 EN 55024:2010+A1:2015 EN 61547: 2009


Model: YS18E



Rated Power: 30W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	7V	9V	12V	18V	24V	36V
Output Current (max.)	3.5A	3.5A	3.3A	2.5A	1.6A	1.25A	0.8A

Dimensions: (mm)

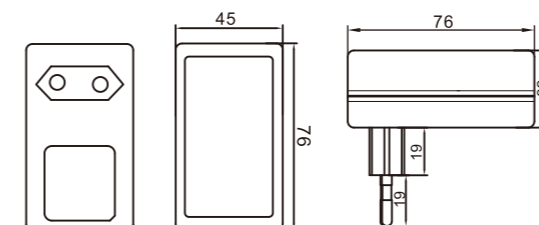

Safety Standard:

IEC/EN62368, IEC / EN61558, IEC / EN60335, EN 610000-3-2: 2014
 IEC / EN60601, IEC / EN61347 EN 61000-3-3: 2013
 EN 55032: 2015 EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015 EN 61547: 2009


Model: YS18U



Rated Power: 30W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: DOE VI
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	7V	9V	12V	18V	24V	36V
Output Current (max.)	3.5A	3.5A	3.3A	2.5A	1.6A	1.25A	0.8A

Dimensions: (mm)

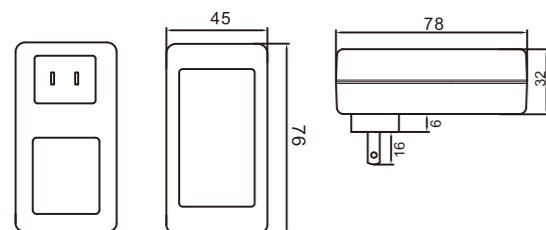

Safety Standard:

UL623681-1, CAN / CSA-C22.2
 UL1310, CAN / CSA- C22.2
 UL60601-1, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YS18A



Rated Power: 30W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: MEPS
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	7V	9V	12V	18V	24V	36V
Output Current (max.)	3.5A	3.5A	3.3A	2.5A	1.6A	1.25A	0.8A

Dimensions: (mm)

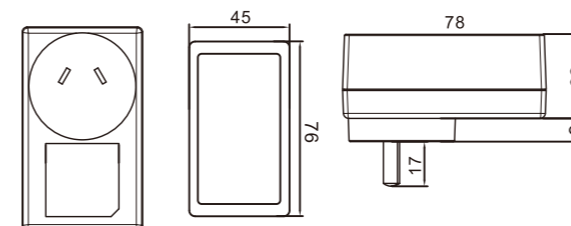

Safety Standard:

AS / NZS 61558.2.16: 2010
 AS / NZS 61558.1: 2008
 AS 61347.2.13: 2018
 AS / NZS 3112: 2017


Model: YS18B



Rated Power: 30W
 Input: 100-240VAC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	7V	9V	12V	18V	24V	36V
Output Current (max.)	3.5A	3.5A	3.3A	2.5A	1.6A	1.25A	0.8A

Dimensions: (mm)

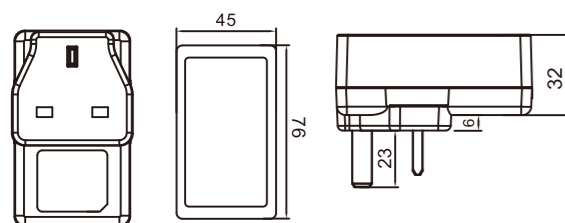

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 61000-3-2: 2014
 IEC / EN60601, IEC / EN61347, EN 61000-3-3: 2013
 EN 55032: 2015, EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015, EN 61547: 2009


Model: YS16E



Rated Power: 18W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	24V	36V
Output Current (max.)	3A	2.5A	2A	1.67A	1.25A	0.75A	0.5A

Dimensions: (mm)

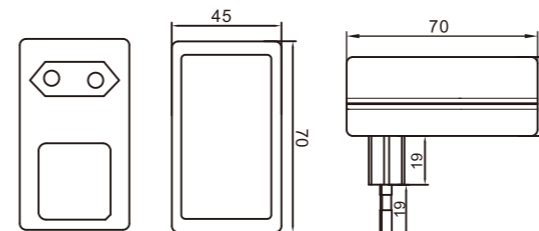

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 61000-3-2: 2014
 IEC / EN60601, IEC / EN61347, EN 61000-3-3: 2013
 EN 55032: 2015, EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015, EN 61547: 2009


Model: YS16U



Rated Power: 18W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: DOE VI
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	24V	36V
Output Current (max.)	3A	2.5A	2A	1.67A	1.25A	0.75A	0.5A

Dimensions: (mm)

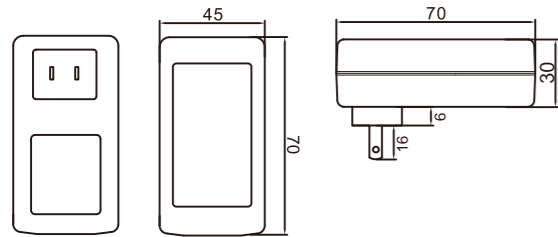

Safety Standard:

UL623681-1, CAN / CSA-C22.2
 UL1310, CAN / CSA-C22.2
 UL60601-1, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YS16B



Rated Power: 18W
 Input: 100-240VAC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	24V	36V
Output Current (max.)	3A	2.5A	2A	1.67A	1.25A	0.75A	0.5A

Dimensions: (mm)

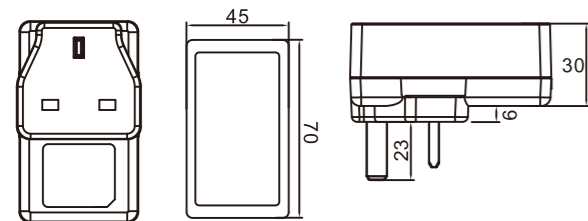

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 61000-3-2: 2014
 IEC / EN60601, IEC / EN61347, EN 61000-3-3: 2013
 EN 55032: 2015, EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015, EN 61547: 2009


Model: YS16A



Rated Power: 18W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: MEPS
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	24V	36V
Output Current (max.)	3A	2.5A	2A	1.67A	1.25A	0.75A	0.5A

Dimensions: (mm)

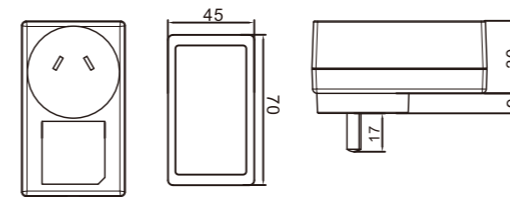

Safety Standard:

AS / NZS 61558.2.16: 2010
 AS / NZS 61558.1: 2008
 AS 61347.2.13: 2018
 AS / NZS 3112: 2017


Model: YS16C



Rated Power: 20W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	18V	24V	36V
Output Current (max.)	3A	3A	2A	1.5A	1.2A	1A	0.8A	0.5A

Dimensions: (mm)

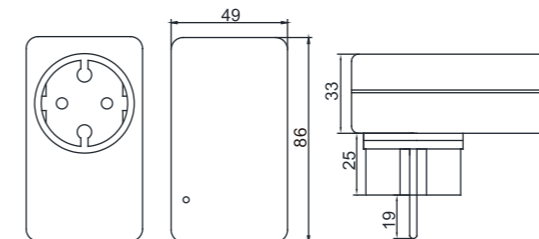

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 61000-3-2: 2014
 IEC / EN60601, IEC / EN61347, EN 61000-3-3: 2013
 EN 55032: 2015, EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015, EN 61547: 2009


Model: YS16M



Rated Power: 18W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: DOE VI
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	24V	36V
Output Current (max.)	3A	2.5A	2A	1.67A	1.25A	0.75A	0.5A

Dimensions: (mm)

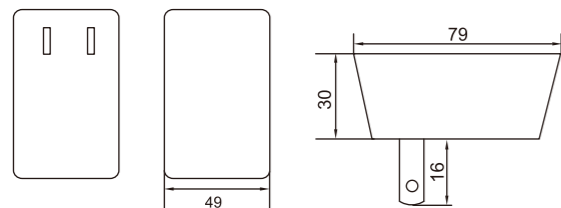

Safety Standard:

UL623681-1, CAN / CSA-C22.2
 UL1310, CAN / CSA-C22.2
 UL60601-1, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YS30E



Rated Power: 30W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	7V	9V	12V	18V	24V	36V
Output Current (max.)	3.5A	3.5A	3.3A	2.5A	1.6A	1.25A	0.8A

Dimensions: (mm)

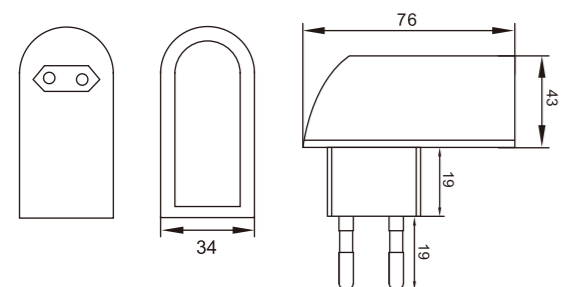

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 610000-3-2: 2014
 IEC / EN60601, IEC / EN61347, EN 61000-3-3: 2013
 EN 55032: 2015, EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015, EN 61547: 2009


Model: YS12E



Rated Power: 12W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	15V	24V	36V
Output Current (max.)	2A	2A	1.5A	1.3A	1A	0.8A	0.5A	0.35A

Dimensions: (mm)

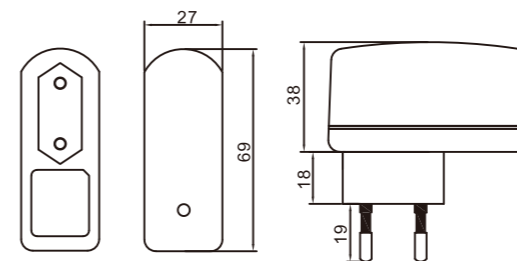

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 610000-3-2: 2014
 IEC / EN60601, IEC / EN61347, EN 61000-3-3: 2013
 EN 55032: 2015, EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015, EN 61547: 2009


Model: YS12U



Rated Power: 12W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: DOE VI
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	15V	24V	36V
Output Current (max.)	2A	2A	1.5A	1.3A	1A	0.8A	0.5A	0.35A

Dimensions: (mm)

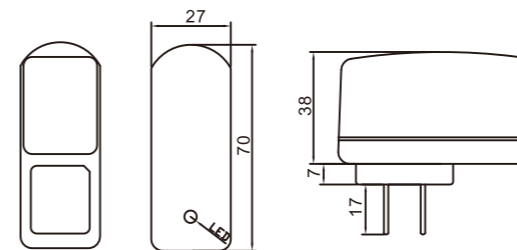

Safety Standard:

UL623681-1, CAN / CSA-C22.2
 UL1310, CAN / CSA-C22.2
 UL60601-1, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YS12B



Rated Power: 12W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	15V	24V	36V
Output Current (max.)	2A	2A	1.5A	1.3A	1A	0.8A	0.5A	0.35A

Dimensions: (mm)

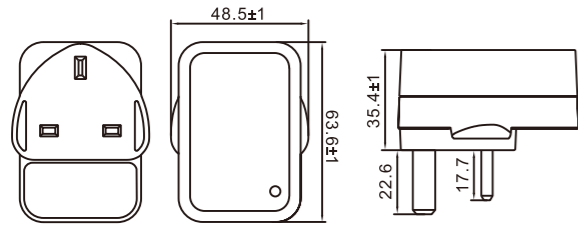

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 610000-3-2: 2014
 IEC / EN60601, IEC / EN61347, EN 61000-3-3: 2013
 EN 55032: 2015, EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015, EN 61547: 2009


Model: YS10E



Rated Power: 12W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	15V	24V	36V
Output Current (max.)	2A	2A	1.5A	1.2A	1A	0.8A	0.5A	0.35A

Dimensions: (mm)

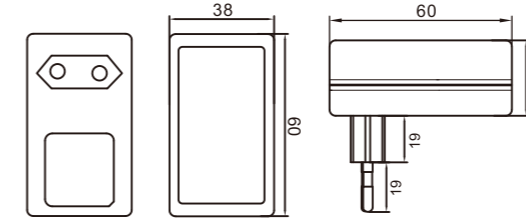

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 610000-3-2: 2014
 IEC / EN60601, IEC / EN61347, EN 61000-3-3: 2013
 EN 55032: 2015, EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015, EN 61547: 2009


Model: YS12A



Rated Power: 12W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: MEPS
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	15V	24V	36V
Output Current (max.)	2A	2A	1.5A	1.3A	1A	0.8A	0.5A	0.35A

Dimensions: (mm)

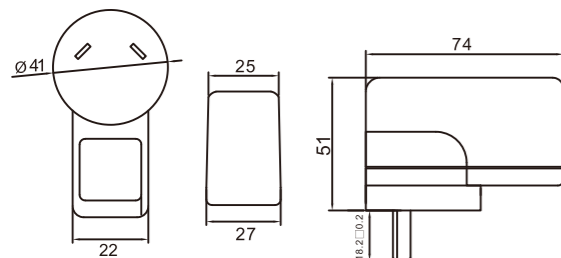

Safety Standard:

AS / NZS 61558.2.16: 2010
 AS / NZS 61558.1: 2008
 AS 61347.2.13: 2018
 AS / NZS 3112: 2017


Model: YS10U



Rated Power: 12W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: DOE VI
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	15V	24V	36V
Output Current (max.)	2A	2A	1.5A	1.2A	1A	0.8A	0.5A	0.35A

Dimensions: (mm)

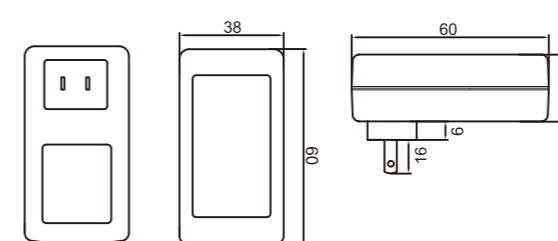

Safety Standard:

UL623681-1, CAN / CSA-C22.2
 UL1310, CAN / CSA-C22.2
 UL60601-1, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YS10B



Rated Power: 12W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	15V	24V	36V
Output Current (max.)	2A	2A	1.5A	1.2A	1A	0.8A	0.5A	0.35A

Dimensions: (mm)

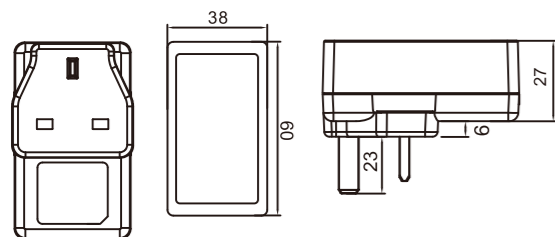

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 610000-3-2: 2014
 IEC / EN60601, IEC / EN61347 EN 61000-3-3: 2013
 EN 55032: 2015 EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015 EN 61547: 2009


Model: YS7E



Rated Power: 7W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	4.2V	5V	6V	7.5V	9V	12V	24V
Output Current (max.)	1A	1.2A	1A	0.8A	0.6A	0.5A	0.3A

Dimensions: (mm)

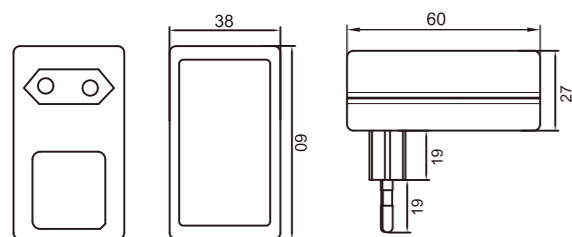

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 610000-3-2: 2014
 IEC / EN60601, IEC / EN61347 EN 61000-3-3: 2013
 EN 55032: 2015 EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015 EN 61547: 2009


Model: YS6E



Rated Power: 6W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	24V	36V
Output Current (max.)	1.2A	1A	0.8A	0.6A	0.5A	0.25A	0.18A

Dimensions: (mm)

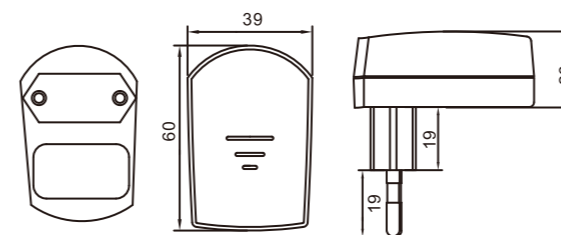

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 610000-3-2: 2014
 IEC / EN60601, IEC / EN61347 EN 61000-3-3: 2013
 EN 55032: 2015 EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015 EN 61547: 2009


Model: YS6U



Rated Power: 6W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: DOE VI
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	24V	36V
Output Current (max.)	1.2A	1A	0.8A	0.6A	0.5A	0.25A	0.18A

Dimensions: (mm)

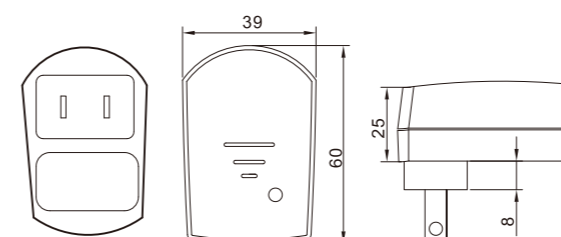

Safety Standard:

UL623681-1, CAN / CSA-C22.2
 UL1310, CAN / CSA-C22.2
 UL60601-1, CAN / CSA-C22.2
 FCC PART 15 CLASS B

Switching Power Adapters

YS6 Series


Model: YS6B



Rated Power: 6W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	24V	36V
Output Current (max.)	1.2A	1A	0.8A	0.6A	0.5A	0.25A	0.18A

Dimensions: (mm)

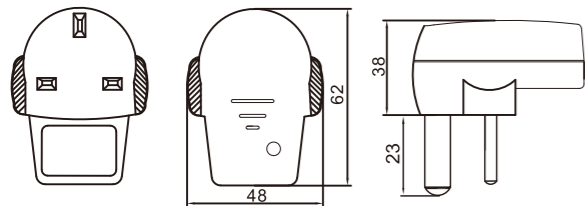

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 61000-3-2: 2014
 IEC / EN60601, IEC / EN61347 EN 61000-3-3: 2013
 EN 55032: 2015 EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015 EN 61547: 2009

Switching Power Adapters

YS5 Series


Model: YS5E



Rated Power: 5W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	24V	36V
Output Current (max.)	1A	0.83A	0.67A	0.56A	0.42A	0.21A	0.14A

Dimensions: (mm)

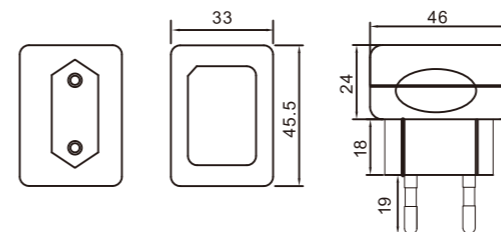

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 61000-3-2: 2014
 IEC / EN60601, IEC / EN61347 EN 61000-3-3: 2013
 EN 55032: 2015 EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015 EN 61547: 2009


Model: YS5M



Rated Power: 5W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	24V	36V
Output Current (max.)	1A	0.83A	0.67A	0.56A	0.42A	0.21A	0.14A

Dimensions: (mm)



Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 61000-3-2: 2014
 IEC / EN60601, IEC / EN61347 EN 61000-3-3: 2013
 EN 55032: 2015 EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015 EN 61547: 2009


Model: YS5U



Rated Power: 5W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: DOE VI
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	24V	36V
Output Current (max.)	1A	0.83A	0.67A	0.56A	0.42A	0.21A	0.14A

Dimensions: (mm)

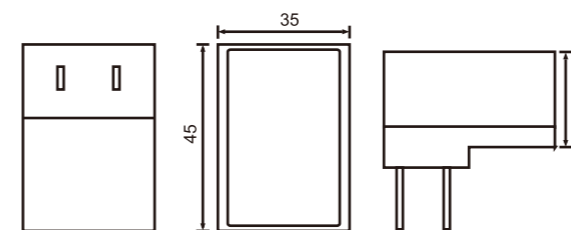

Safety Standard:

UL62368-1, CAN / CSA-C22.2
 UL1310, CAN / CSA-C22.2
 UL60601-1, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YS60C-E



Rated Power: 60W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.1W
Efficiency Level: CoC V5
Protection: Short Circuit, OCP, OVP
Output: 5-36V

Output Voltage (DC)	8.4V	12.6V	14.4V	16.8V	21V	25.2V	29.2V	42V
Output Current (max.)	5A	5A	4A	3.5A	2.5A	2.4A	2A	1.4A

Dimensions: (mm)

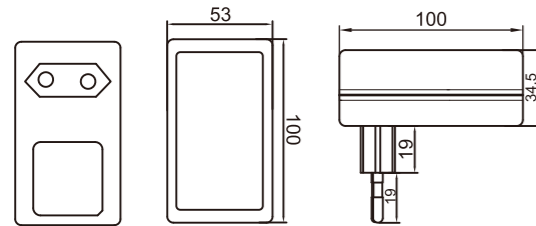

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 610000-3-2: 2014
IEC / EN60601, IEC / EN61347, EN 61000-3-3: 2013
EN 55032: 2015, EN 55015: 2013+A1: 2015
EN 55024: 2010+A1: 2015, EN 61547: 2009


Model: YS40C-E



Rated Power: 40W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.1W
Efficiency Level: CoC V5
Protection: Short Circuit, OCP, OVP

Output Voltage (DC)	8.4V	12.6V	14.4V	16.8V	21V	25.2V	29.2V	42V
Output Current (max.)	4A	3A	2.5A	2.4A	2A	1.5A	1.3A	0.9A

Dimensions: (mm)

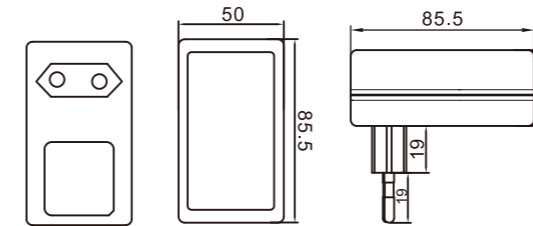

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 610000-3-2: 2014
IEC / EN60601, IEC / EN61347, EN 61000-3-3: 2013
EN 55032: 2015, EN 55015: 2013+A1: 2015
EN 55024: 2010+A1: 2015, EN 61547: 2009


Model: YS60C-U



Rated Power: 60W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.1W
Efficiency Level: DOE VI
Protection: Short Circuit, OCP, OVP
Output: 5-36V

Output Voltage (DC)	8.4V	12.6V	14.4V	16.8V	21V	25.2V	29.2V	42V
Output Current (max.)	5A	5A	4A	3.5A	2.5A	2.4A	2A	1.4A

Dimensions: (mm)

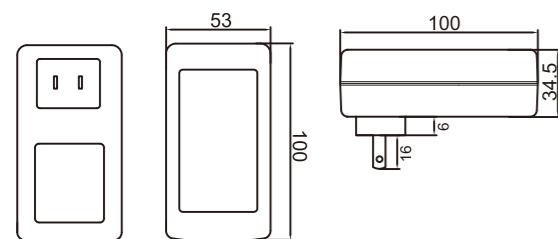

Safety Standard:

UL623681-1, CAN / CSA-C22.2
UL1310, CAN / CSA-C22.2
UL60601-1, CAN / CSA-C22.2
FCC PART 15 CLASS B


Model: YS40C-U



Rated Power: 40W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.1W
Efficiency Level: MEPS
Protection: Short Circuit, OCP, OVP
Output: 5-36V

Output Voltage (DC)	8.4V	12.6V	14.4V	16.8V	21V	25.2V	29.2V	42V
Output Current (max.)	4A	3A	2.5A	2.4A	2A	1.5A	1.3A	0.9A

Dimensions: (mm)

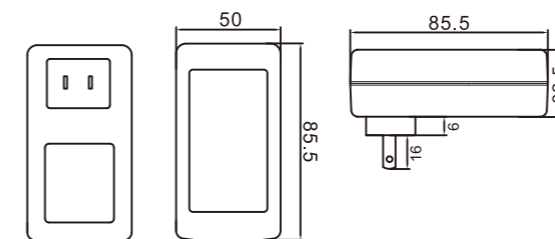

Safety Standard:

AS / NZS 61558.2.16: 2010
AS / NZS 61558.1: 2008
AS 61347.2.13: 2018
AS / NZS 3112: 2017


Model: YS25C-E



Rated Power: 30W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	4.2V	8.4V	12.6V	14.4V	16.8V	21V	25.2V	29.2V	42V
Output Current (max.)	3A	3A	2A	1.5A	1.5A	1.2A	1A	0.85A	0.6A

Dimensions: (mm)

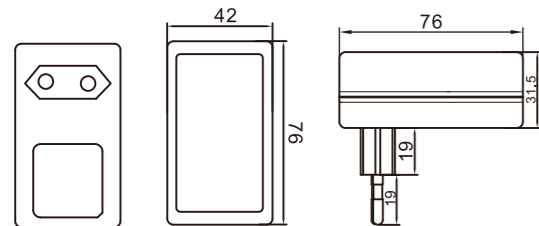

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 610000-3-2: 2014
 IEC / EN60601, IEC / EN61347, EN 61000-3-3: 2013
 EN 55032: 2015, EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015, EN 61547: 2009


Model: YS12C-E



Rated Power: 13W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: CoC V5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	4.2V	8.4V	12.6V	14.4V	16.8V	21V	25.2V	29.2V	42V
Output Current (max.)	1.5A	2A	1A	0.8A	0.7A	0.5A	0.5A	0.4A	0.3A

Dimensions: (mm)

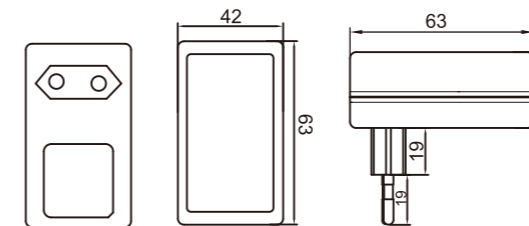

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 610000-3-2: 2014
 IEC / EN60601, IEC / EN61347, EN 61000-3-3: 2013
 EN 55032: 2015, EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015, EN 61547: 2009


Model: YS25C-U



Rated Power: 30W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: DOE VI
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	4.2V	8.4V	12.6V	14.4V	16.8V	21V	25.2V	29.2V	42V
Output Current (max.)	3A	3A	2A	1.5A	1.5A	1.2A	1A	0.85A	0.6A

Dimensions: (mm)

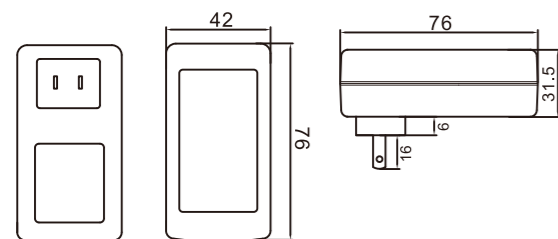

Safety Standard:

UL623681-1, CAN / CSA-C22.2
 UL1310, CAN / CSA-C22.2
 UL60601-1, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YS12C-U



Rated Power: 13W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: MEPS
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	4.2V	8.4V	12.6V	14.4V	16.8V	21V	25.2V	29.2V	42V
Output Current (max.)	1.5A	2A	1A	0.8A	0.7A	0.5A	0.5A	0.4A	0.3A

Dimensions: (mm)

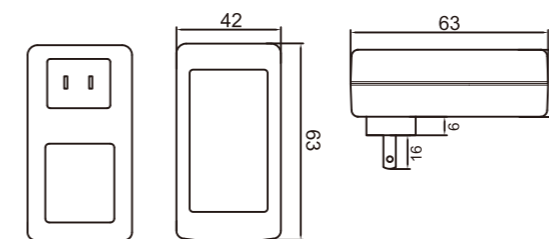

Safety Standard:

AS / NZS 61558.2.16: 2010
 AS / NZS 61558.1: 2008
 AS 61347.2.13: 2018
 AS / NZS 3112: 2017


Model: YS7C-E



Rated Power: 7W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.1W
Efficiency Level: CoC V5
Protection: Short Circuit, OCP, OVP
Output: 5-36V

Output Voltage (DC)	4.2V	8.4V	12.6V	14.4V	16.8V	21V	25.2V	29.2V
Output Current (max.)	1A	0.8A	0.5A	0.5A	0.4A	0.3A	0.2A	0.2A

Dimensions: (mm)

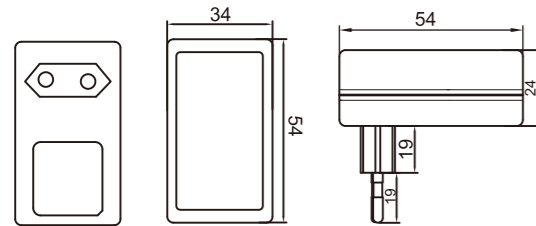

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60335, EN 610000-3-2: 2014
IEC / EN60601, IEC / EN61347, EN 61000-3-3: 2013
EN 55032: 2015, EN 55015: 2013+A1: 2015
EN 55024: 2010+A1: 2015, EN 61547: 2009


Model: YS7C-U



Rated Power: 7W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.1W
Efficiency Level: DOE VI
Protection: Short Circuit, OCP, OVP
Output: 5-36V

Output Voltage (DC)	4.2V	8.4V	12.6V	14.4V	16.8V	21V	25.2V	29.2V
Output Current (max.)	1A	0.8A	0.5A	0.5A	0.4A	0.3A	0.2A	0.2A

Dimensions: (mm)

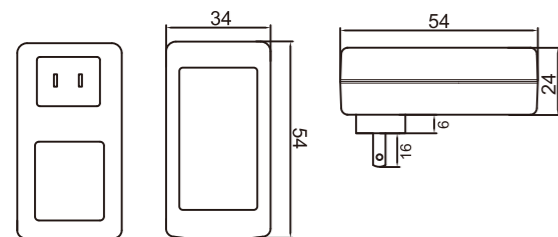

Safety Standard:

UL623681-1, CAN / CSA-C22.2
UL1310, CAN / CSA-C22.2
UL60601-1, CAN / CSA-C22.2
FCC PART 15 CLASS B


Model: YSV40



Rated Power: 60W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.1W
Efficiency Level: DOE VI / COC V5
Protection: Short Circuit, OCP, OVP
Output: 5-48V

Output Voltage (DC)	5V	9V	12V	18V	24V	36V	48V
Output Current (max.)	5A	5A	5A	3.33A	2.5A	1.66A	1.25A

Dimensions: (mm)

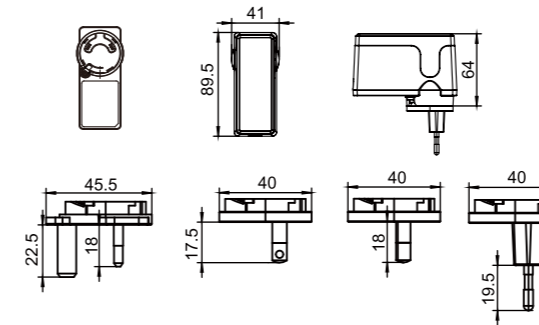

Safety Standard:

IEC / EN62368-1, IEC / EN61558-1, IEC / EN60335-1,
IEC / EN60601-1, UL62368-1, ULANSI / AAMI ES60601-1
EN 55011classB
EN 61000-2-2,3
EN 61000-4-2
FCC part15 classB


Model: YSV24



Rated Power: 30W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.1W
Efficiency Level: DOE VI / COC V5
Protection: Short Circuit, OCP, OVP
Output: 5-48V

Output Voltage (DC)	5V	9V	12V	15V	18V	24V	48V
Output Current (max.)	4A	3.3A	2.5A	2A	1.66A	1.25A	0.62A

Dimensions: (mm)

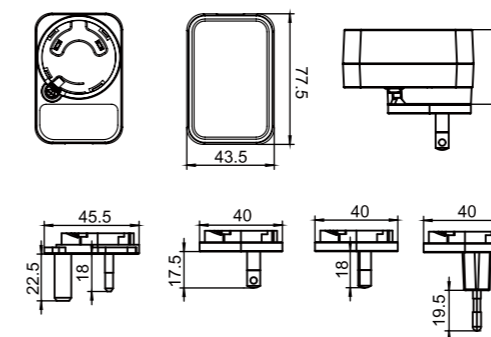

Safety Standard:

IEC / EN62368-1, IEC/EN61558-1, IEC / EN60335-1,
IEC / EN60601-1, UL62368-1, ULANSI / AAMI ES60601-1
EN 55011classB
EN 61000-2-2,3
EN 61000-4-2
FCC part15 classB


Model: YSV12



Rated Power: 12W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.1W
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP
Output: 5-36V

Output Voltage (DC)	5V	9V	12V	15V	18V	24V
Output Current (max.)	2.4A	1.33A	1A	0.8A	0.67A	0.5A

Dimensions: (mm)

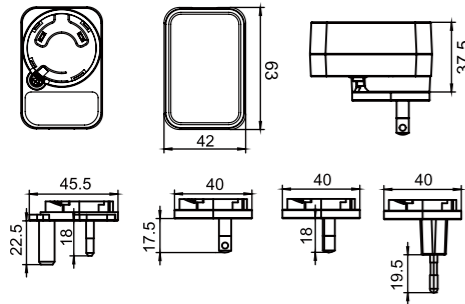

Safety Standard:

IEC / EN62368-1, IEC/EN61558-1, IEC / EN60335-1,
IEC / EN60601-1, UL62368-1, ULANSI / AAMI ES60601-1
EN 55011classB
EN 61000-2-2,3
EN 61000-4-2
FCC part15 classB


Model: YSV24 USB



Rated Power: 18W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.1W
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP
Output: 15-24V

Output Voltage (DC)	5V	9V	12V
Output Current (max.)	3A	2A	1.5A

Dimensions: (mm)

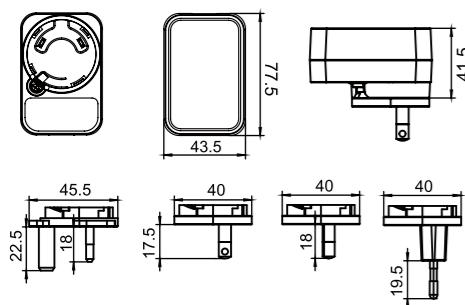

Safety Standard:

IEC / EN62368-1, UL62368-1
EN 55011classB
EN 61000-2-2,3
EN 61000-4-2
FCC part15 classB


Model: YSV12 USB



Rated Power: 10W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.1W
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP
Output: 5-48V

Output Voltage (DC)	5V	5V
Output Current (max.)	1A	2A

Dimensions: (mm)

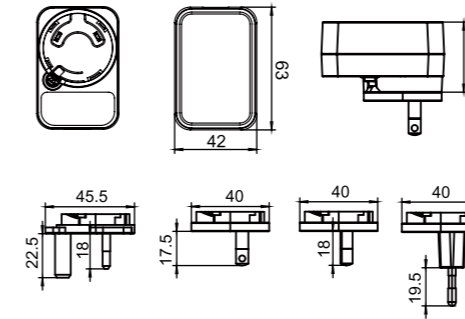

Safety Standard:

IEC / EN62368-1, IEC / EN61558-1, IEC / EN60335-1,
IEC / EN60601-1, UL62368-1, ULANSI / AAMI ES60601-1
EN 55011classB
EN 61000-2-2,3
EN 61000-4-2
FCC part15 classB


Model: YSV90



Rated Power: 90W
Input: 100-240V AC, 50 / 60Hz
Standby Power: ≤0.1W
Efficiency Level: DOE VI / COCV5
Protection: Short Circuit, OCP, OVP
Output: 15-24V

Output Voltage (DC)	15V	16V	18V	19V	20V	22V	24V
Output Current (max.)	6A	5.6A	5A	4.74A	4.5A	4.1A	3.75A

Dimensions: (mm)

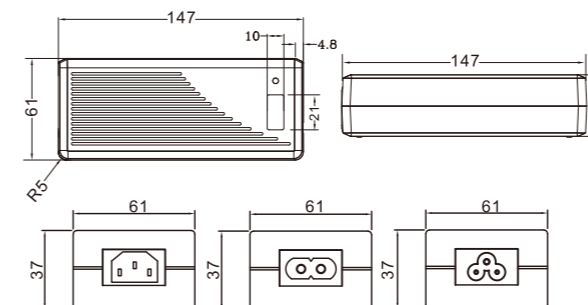

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558, EN 61000-3-2: 2014
IEC / EN60335, IEC / EN60601, IEC / EN61347 EN 61000-3-3: 2013
FCC part15 EN 55015: 2013+A1: 2015
EN 55032: 2015 EN 61547: 2009
EN 55024: 2010+A1: 2015


Model: YSV60



Rated Power: 60W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.21W
 Efficiency Level: DOE VI / COCV5
 Protection : Short Circuit, OCP, OVP
 Output: 6-24V

Output Voltage (DC)	6V	7.5V	9V	12V	13.5V	15V	16V
Output Current (max.)	5A			3.8A			4A
Output Voltage (DC)	9V	12V	13.5V	15V	19V	20V	24V
Output Current (max.)	3.42A			2.5A			

Dimensions: (mm)

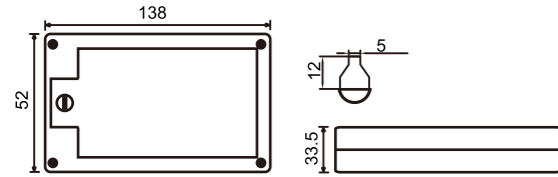

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YSV36



Rated Power: 36W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: DOE VI / COCV5
 Protection: Short Circuit ,OCP, OVP
 Output: 5-24V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	13.5V	15V
Output Current (max.)	3A			2.4A			
Output Voltage (DC)	9V	12V	13.5V	15V	18V	20V	24V
Output Current (max.)	2A			1.5A			

Dimensions: (mm)

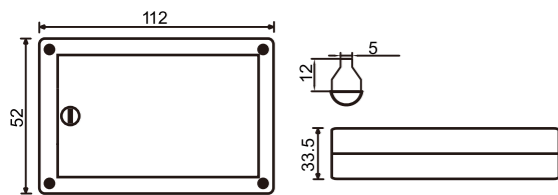

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YSV1500B



Rated Power: 27W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: COCV5
 Protection: Short Circuit, OCP, OVP
 Output: 3-24V

Output Voltage (DC)	3V	4.5V	5V	6V	7.5V	9V	12V
Output Current (max.)	1500mA/ 2250mA						
Output Voltage (DC)	9V	12V	13.5V	15V	18V	20V	24V
Output Current (max.)	750mA/ 1000mA						

Dimensions: (mm)

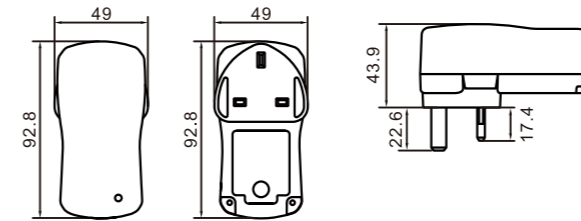

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YSV1500



Rated Power: 27W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: COCV5
 Protection: Short Circuit, OCP, OVP
 Output: 3-24V

Output Voltage (DC)	3V	4.5V	5V	6V	7.5V	9V	12V
Output Current (max.)	1500mA/ 2250mA						
Output Voltage (DC)	9V	12V	13.5V	15V	18V	20V	24V
Output Current (max.)	750mA/ 1000mA						

Dimensions: (mm)

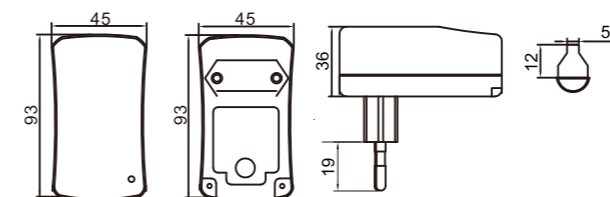

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YSV1000



Rated Power: 12W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.1W
 Efficiency Level: COCV5
 Protection: Short Circuit, OCP, OVP
 Output: 3-12V

Output Voltage (DC)	3V	4.5V	5V	6V	7.5V	9V	12V
Output Current (max.)	1000mA						

Dimensions: (mm)

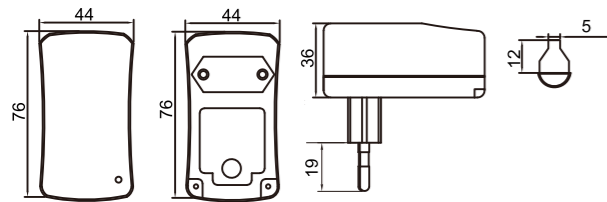

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YSV500



Rated Power: 7.2W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: ≤0.3W
 Efficiency Level: V
 Protection: Short Circuit, OCP, OVP
 Output: 3-12V

Output Voltage (DC)	3V	4.5V	5V	6V	7.5V	9V	12V
Output Current (max.)	500mA/600mA						

Dimensions: (mm)

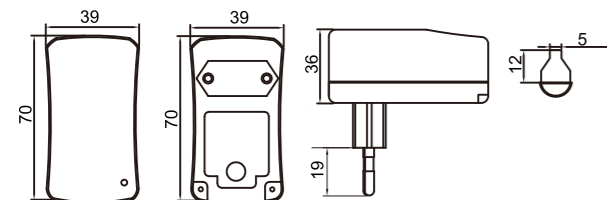

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YSM90T



Related Power:90W
 Input: 85-305VAC, 50/60Hz
 Standby Power: < 0.1 W
 Class II Isolation Level
 By LPS
 Protection:Short Circuit, OLP, CVP
 Output:12-48V

Output Voltage (DC/AC)	12V	15V	24V	48V
Output Current	7.5A	6A	3.75A	1.875A

Dimensions: (mm)

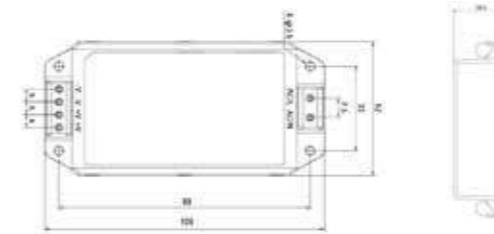

Safety Standard:

IEC62368-1, UL62368-1, TUV EN62368-1,
 EAC TP TC 004, -1 approved
 EN55032(CISPR32), CNS13438,
 EN61000-3-2 Class A,EN61000-3-3

Model: YSM60T-45/YSM60T




Related Power:45W/60W
 Input: 85-305VAC, 50/60Hz
 Standby Power: < 0.1 W
 Class II Isolation Level
 By LPS
 Protection:Short Circuit, OLP, CVP
 Output:5-48V

Output Voltage (DC/AC)	5V	12V	15V	24V	48V
Output Current	8A	3.8A	3A	1.9A	0.94A

Output Voltage (DC/AC)	5V	12V	15V	24V	48V
Output Current	10A	5A	4A	2.5A	1.25A

Dimensions: (mm)

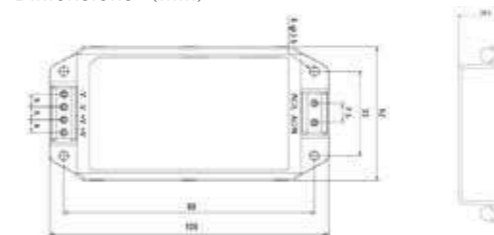

Safety Standard:

IEC62368-1, UL62368-1, TUV EN62368-1,
 EAC TP TC 004, -1 approved
 EN55032(CISPR32), CNS13438,
 EN61000-3-2 Class A,EN61000-3-3


Model: YSM30T



Related Power:30W
Input: 85-305VAC, 50/60Hz
Standby Power: < 0.1 W
Class II Isolation Level
By LPS
Protection:Short Circuit, OLP, CVP
Output:5-48V

Output Voltage (DC/AC)	5V	12V	15V	24V	48V
Output Current	6A	2.5A	2A	1.3A	0.63A

Dimensions: (mm)

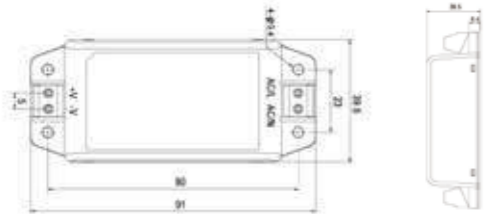

Safety standard:

IEC62368-1, UL62368-1, TUV EN62368-1,
EAC TP TC 004, -1 approved
EN55032(CISPR32), CNS13438,
EN61000-3-2 Class A,EN61000-3-3


Model: YSM90



Related Power:90W
Input: 85-305VAC, 50/60Hz
Standby Power: < 0.1 W
Class II Isolation Level
By LPS
Protection:Short Circuit, OLP, CVP
Output:12-48V

Output Voltage (DC/AC)	12V	15V	24V	48V
Output Current	7.5A	6A	3.75A	1.875A

Dimensions: (mm)

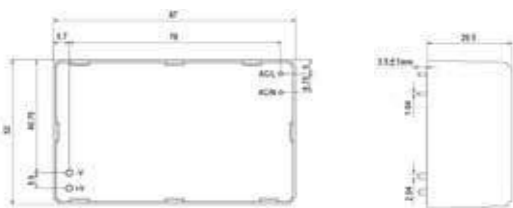

Safety standard:

IEC62368-1, UL62368-1, TUV EN62368-1,
EAC TP TC 004, -1 approved
EN55032(CISPR32), CNS13438,
EN61000-3-2 Class A,EN61000-3-3


Model: YSM60-45/YSM-60



Related Power:45W/60W
Input: 85-305VAC, 50/60Hz
Standby Power: < 0.1 W
Class II Isolation Level
By LPS
Protection:Short Circuit, OLP, CVP
Output:5-48V

Output Voltage (DC/AC)	5V	12V	15V	24V	48V
Output Current	8A	3.8A	3A	1.9A	0.94A
Output Voltage (DC/AC)	5V	12V	15V	24V	48V
Output Current	10A	5A	4A	2.5A	1.25A

Dimensions: (mm)

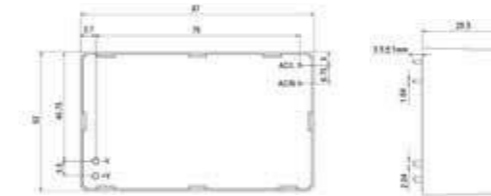

Safety Standard:

IEC62368-1, UL62368-1, TUV EN62368-1,
EAC TP TC 004, -1 approved
EN55032(CISPR32), CNS13438,
EN61000-3-2 Class A,EN61000-3-3

Model: YSM30



Related Power:30W
Input: 85-305VAC, 50/60Hz
Standby Power: < 0.1 W
Class II Isolation Level
By LPS
Protection:Short Circuit, OLP, CVP
Output:5-48V

Output Voltage (DC/AC)	5V	12V	15V	24V	48V
Output Current	6A	2.5A	2A	1.3A	0.63A

Dimensions: (mm)



Safety Standard:

IEC62368-1, UL62368-1, TUV EN62368-1,
EAC TP TC 004, -1 approved
EN55032(CISPR32), CNS13438,
EN61000-3-2 Class A,EN61000-3-3

Model: YSM20-15/YSM-20




Related Power:15W/20W
Input: 85-305VAC, 50/60Hz
Standby Power: < 0.1 W
Class II Isolation Level
By LPS
Protection:Short Circuit, OLP, CVP
Output:3.3-24V

Output Voltage (DC/AC)	3.3V	5V	12V	15V	24V
Output Current	3.5A	3A	1.25A	1A	0.63A
Output Voltage (DC/AC)	3.3V	5V	12V	15V	24V
Output Current	4.5A	4A	1.8A	1.4A	0.9A

Safety standard:

IEC62368-1, UL62368-1, TUV EN62368-1,
EAC TP TC 004, -1 approved
EN55032(CISPR32), CNS13438,
EN61000-3-2 Class A,EN61000-3-3

Dimensions: (mm)

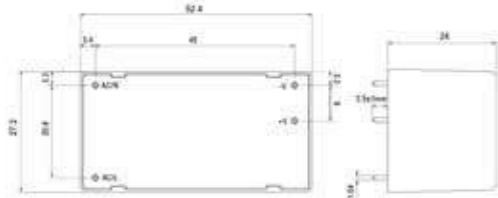

Model: YSM10-5/YSM-10



Related Power:5W/10W
Input: 85-305VAC, 50/60Hz
Standby Power: < 0.1 W
Class II Isolation Level
By LPS
Protection:Short Circuit, OLP, CVP
Output:3.3-24V

Output Voltage (DC/AC)	3.3V	5V	12V	15V	24V
Output Current	1.25A	1A	0.42A	0.33A	0.23A
Output Voltage (DC/AC)	3.3V	5V	12V	15V	24V
Output Current	2.5A	2A	0.85A	0.67A	0.42A

Safety standard:

IEC62368-1, UL62368-1, TUV EN62368-1,
EAC TP TC 004, -1 approved
EN55032(CISPR32), CNS13438,
EN61000-3-2 Class A,EN61000-3-3

Dimensions: (mm)




Model: YS145-9/16 AC/DC



Rated Power: 150W
Input: 90-264V AC, 50 / 60Hz
9 / 16 individually fused outputs with LED
Protection: Short Circuit, OCP, OVP
Output: 12-24V

Output Voltage (DC/AC)	12V					
Output Current	4A	5A	6A	8A	10A	12.5A

Dimensions: (mm)

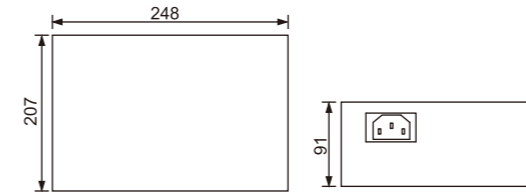

Safety standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013


Model: YS145B-9/16(With Battery Backup)



Rated Power: 150W
Input: 90-264V AC, 50 / 60Hz
9/16 individually PTC outputs with LED
Optional, 12V 7Ah Sealed Lead Acid Backup Battery
Protection: Short Circuit, OCP, OVP
Output: 12V-24V

Output Voltage (DC)	12V					
Output Current	4A	5A	6A	8A	10A	12.5A

Dimensions: (mm)

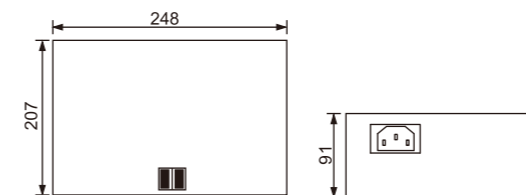

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013


Model: YS36B-5(With Battery Backup)



Rated Power: 60W
 Input: 90-264V AC, 50 / 60Hz
 I/5 individually fused outputs with LED
 Optional, 12V 7Ah Sealed Lead Acid Backup Battery
 Protection: Short Circuit, OCP, OVP
 Output: 12V-24V

Output Voltage (DC)	12V		
Output Current	2A	3A	5A


Dimensions: (mm)

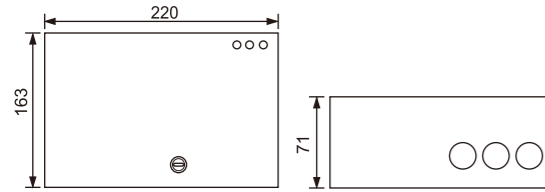

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YS50B(With Battery Backup)

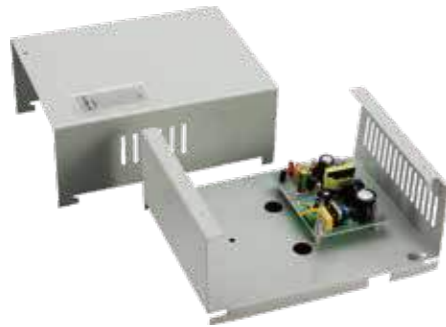

Rated Power: 60W
 Input: 90-264V AC, 50 / 60Hz
 Optional, 12V 7Ah Sealed Lead Acid Backup Battery
 Protection: Short Circuit, OCP, OVP
 Output: 12V-24V

Output Voltage (DC)	12V		
Output Current	2A	3A	5A

Dimensions: (mm)

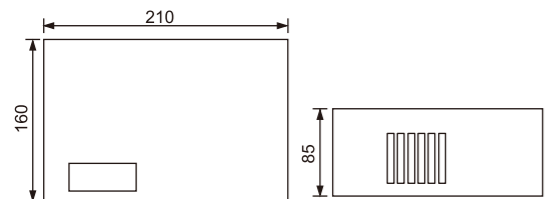

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YSI360



Rated Power: 360W
 Input: 90-264V AC, 50 / 60Hz
 Optional Backup Battery
 Protection: Short Circuit, OCP, OVP
 Output: 5-48V

Output Voltage (DC)	5V	12V	24V	13.8V
Output Current (max.)	40A	30A	15A	20A / 2A(Charging Current)

Dimensions: (mm)

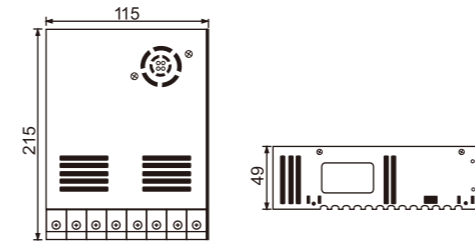

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YSI240



Rated Power: 240W
 Input: 90-264V AC, 50 / 60Hz
 Optional Backup Battery
 Protection: Short circuit, OCP, OVP
 Output: 5-48V

Output Voltage (DC)	5V	12V	24V	13.8V
Output Current (max.)	30A	20A	10A	12A / 1.5A(Charging Current)

Dimensions: (mm)

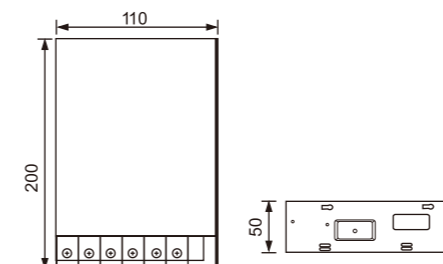

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013

Model: YSI200


CE FC RoHS



Rated Power: 200W
 Input: 90-264V AC, 50 / 60Hz
 Optional Backup Battery
 Protection: Short Circuit, OCP, OVP
 Output: 5-48V

Output Voltage (DC)	5V	12V	24V	13.8V
Output Current (max.)	20A	16A	8A	8A / 1A(Charging Current)

Dimensions: (mm)

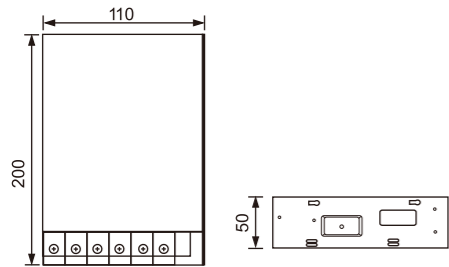

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013

Model: YSI150


CE FC RoHS



Rated Power: 150W
 Input: 90-264V AC, 50 / 60Hz
 Optional Backup Battery
 Protection: Short circuit, OCP, OVP
 Output: 5-48V

Output Voltage (DC)	5V	12V	24V	13.8V
Output Current (max.)	12A	12.5A	6.25A	5A / 0.5A(Charging Current)

Dimensions: (mm)

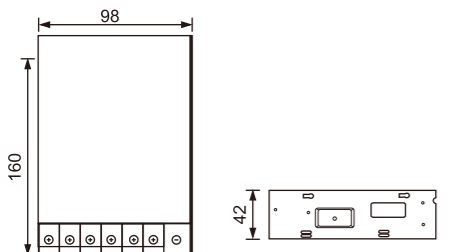

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013

Model: YSI80


CE FC RoHS



Rated Power: 100W
 Input: 90-264VAC, 50 / 60Hz
 Optional Backup Battery
 Protection: Short Circuit, OCP, OVP
 Output: 5-48V

Output Voltage (DC)	5V	12V	24V	13.8V
Output Current (max.)	6A	8.33A	4.16A	2.5A / 0.5A(Charging Current)

Dimensions: (mm)

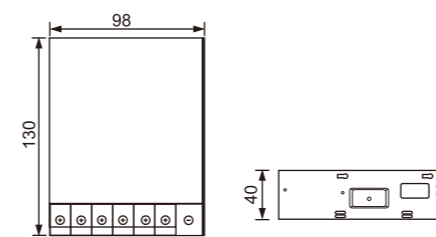

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013

Model: YSI36


CE FC RoHS



Rated Power: 60W
 Input: 90-264V AC, 50 / 60Hz
 Optional Backup Battery
 Protection: Short Circuit, OCP, OVP
 Output: 5-48V

Output Voltage (DC)	5V	12V	24V	13.8V
Output Current (max.)	4A	5A	2.5A	1.5A / 0.5A(Charging Current)

Dimensions: (mm)

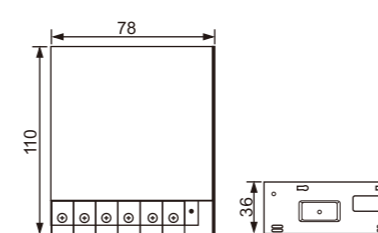

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YSI-20



Rated Power: 25W
 Input: 90-264V AC, 50 / 60Hz
 Optional Backup Battery
 Protection: Short Circuit, OCP, OVP
 Output: 5-48V

Output Voltage (DC)	5V	12V	24V
Output Current (max.)	5A	2.08A	1.04A

Dimensions: (mm)

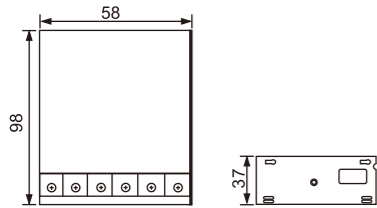

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YSI-15



Rated Power: 15W
 Input: 90-264V AC, 50 / 60Hz
 Optional Backup Battery
 Protection: Short Circuit, OCP, OVP
 Output: 5-48V

Output Voltage (DC)	5V	12V	24V
Output Current (max.)	3A	1.25A	0.63A

Dimensions: (mm)

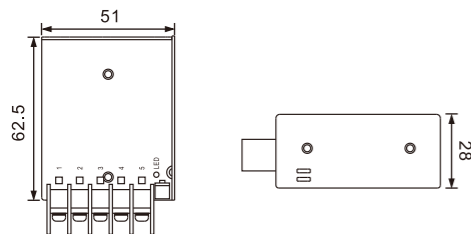

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YEL600



Rated Power: 600W
 Input: 100-240V AC 50Hz
 Protection: Short Circuit, OCP, OVP
 Output: 5-48V

Output Voltage (DC)	12V	24V	36V	48V
Output Current (max.)	50A	25A	16.6A	12.5A

Dimensions: (mm)

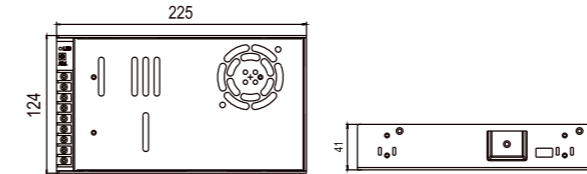

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YEL450



Rated Power: 450W
 Input: 100-240V AC 50Hz
 Protection: Short Circuit, OCP, OVP
 Output: 5-48V

Output Voltage (DC)	12V	24V	36V	48V
Output Current (max.)	37.5A	18.8A	12.5A	9.4A

Dimensions: (mm)

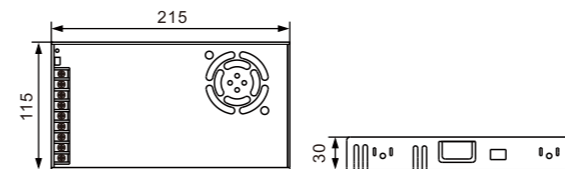

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YEL350



Rated Power: 350W
Input: 100-240V AC 50Hz
Protection: Short Circuit, OCP, OVP
Output: 5-48V

Output Voltage (DC)	12V	24V	36V	48V
Output Current (max.)	29A	14.6A	9.7A	7.3A

Dimensions: (mm)

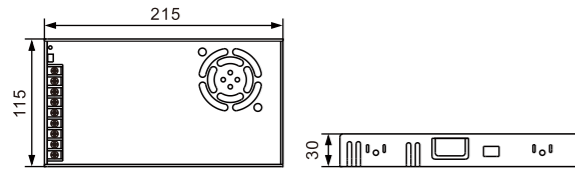

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
EN 55032: 2015
EN 55024: 2010+A1:2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013


Model: YEL200



Rated Power: 200W
Input: 100-240V AC 50Hz
Protection: Short Circuit, OCP, OVP
Output: 5-48V

Output Voltage (DC)	12V	24V	36V	48V
Output Current (max.)	17A	8.8A	5.9A	4.4A

Dimensions: (mm)

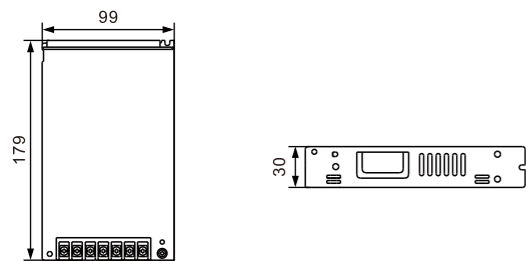

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013


Model: YEL150



Rated Power: 150W
Input: 100-240V AC 50Hz
Protection: Short Circuit, OCP, OVP
Output: 5-48V

Output Voltage (DC)	5V	12V	24V	48V
Output Current (max.)	22A	12.5A	6.5A	3.3A

Dimensions: (mm)

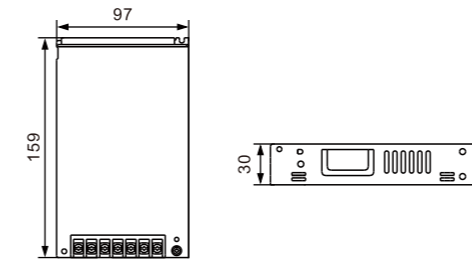

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013


Model: YEL100



Rated Power: 100W
Input: 100-240V AC 50Hz
Protection: Short Circuit, OCP, OVP
Output: 5-48V

Output Voltage (DC)	5V	12V	24V	48V
Output Current (max.)	18A	8.5A	4.5A	2.3A

Dimensions: (mm)

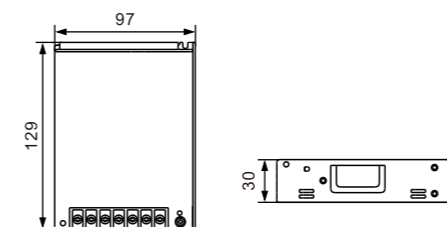

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
EN 55032: 2015
EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014
EN 61000-3-3: 2013

Low Profile Enclosed Power Supplies

YEL75 | YEL50 Series


Model: YEL75



Rated Power: 75W
 Input: 100-240V AC 50Hz
 Protection: Short Circuit, OCP, OVP
 Output: 5-48V

Output Voltage (DC)	5V	12V	24V	48V
Output Current (max.)	14A	6A	3.2A	1.6A

Dimensions: (mm)

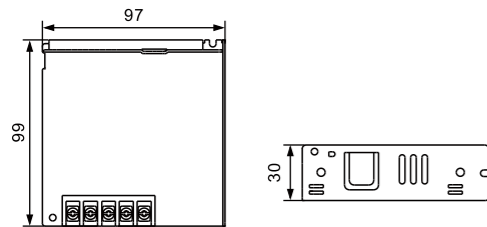

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013

Model: YEL50




Rated Power: 50W
 Input: 100-240V AC 50Hz
 Protection: Short Circuit, OCP, OVP
 Output: 5-48V

Output Voltage (DC)	5V	12V	24V	48V
Output Current (max.)	10A	4.2A	2.2A	1.1A

Output Voltage (DC)	5V	12V	24V	48V
Output Current (max.)	7A	3A	1.5A	0.8A

Dimensions: (mm)

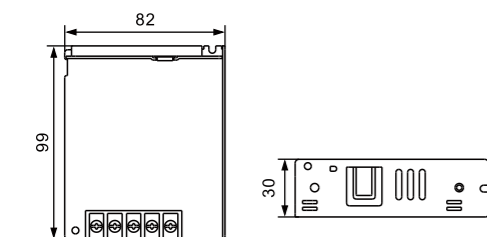

Safety Standard:

IEC / EN62368, IEC / EN60950, IEC / EN61558
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013

Waterproof Power Supplies

YSC120 | YSC80 Series


Model: YSC120



Rated Power: 150W
 Input: 100-240V AC, 50/60Hz
 Standby Power: $\leq 0.21W$
 Efficiency Level: DOE VI / COCV5
 Protection: Short Circuit, OCP, OVP, OTP
 Output: 9-48V

Output Voltage (DC)	9V	12V	15V	19V	24V	48V
Output Current (max.)	15A	12.5A	10A	7.8A	6.25A	3.12A

Dimensions: (mm)

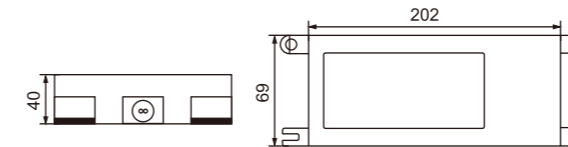

Safety Standard:

UL62368, UL1310
 IEC / En62368, IEC / EN61558,
 IEC / EN60335
 FCC PART15 CLASS B

EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YSC80



Rated Power: 80W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: $< 0.075W$
 Efficiency Level: DOE VI / COCV5
 Protection: Short Circuit, OCP, OVP
 Output: 9-48V

Output Voltage (DC)	9V	12V	15V	19V	24V	48V
Output Current (max.)	6A	7A	5.3A	4.3A	3.5A	1.66A

Dimensions: (mm)

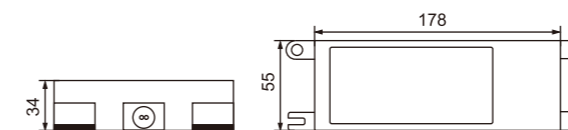

Safety Standard:

UL62368, UL1310
 IEC / En62368, IEC / EN61558,
 IEC / EN60335
 FCC PART15 CLASS B

EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YSC50



Rated Power: 60W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: <0.075W
 Efficiency Level: DOE VI / COCV5
 Protection: Short Circuit, OCP, OVP
 Output: 9-48V

Output Voltage (DC)	9V	12V	15V	19V	24V	48V
Output Current (max.)	5A	5A	4A	3.16A	2.5A	1.25A

Dimensions: (mm)

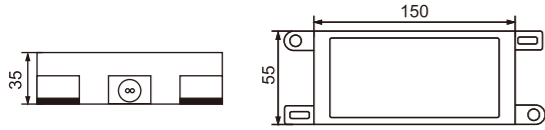

Safety Standard:

UL62368, UL1310
 IEC / En62368, IEC / EN61558,
 IEC / EN60335
 FCC PART15 CLASS B

EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YSC20



Rated Power: 24W
 Input: 100-240VAC, 50 / 60Hz
 Standby Power: <0.075W
 Efficiency Level: DOE VI / COCV5
 Protection: Short circuit, OCP, OVP
 Output: 5-24V

Output Voltage (DC)	5V	9V	12V	15V	24V
Output Current (max.)	3A	2A	2A	1.6A	1A

Dimensions: (mm)

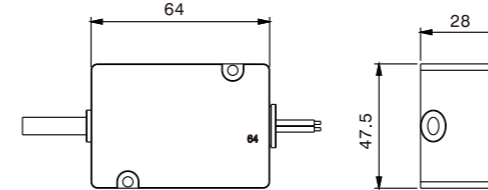

Safety Standard:

UL62368, UL1310
 IEC / En62368, IEC / EN61558,
 IEC / EN60335, IEC / EN61347
 FCC PART15 CLASS B

EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YSC42



Rated Power: 36W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: <0.075W
 Efficiency Level: DOE VI / COCV5
 Protection: Short Circuit, OCP, OVP
 Output: 5V-48V

Output Voltage (DC)	5V	12V	15V	24V	36V	48V
Output Current (max.)	5A	3A	2.4A	1.5A	1A	0.75A

Dimensions: (mm)

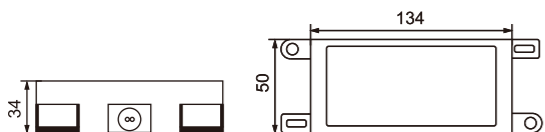

Safety Standard:

UL62368, UL1310
 IEC / En62368, IEC / EN61558,
 IEC / EN60335
 FCC PART15 CLASS B

EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YSC12



Rated Power: 12W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: <0.075W
 Efficiency Level: DOE VI / COCV5
 Protection: Short Circuit, OCP, OVP
 Output: 5-24V

Output Voltage (DC)	5V	9V	12V	15V	24V
Output Current (max.)	2A	1.3A	1A	0.8A	0.5A

Dimensions: (mm)

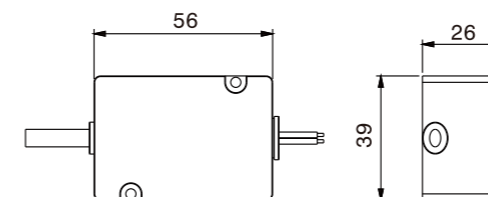

Safety Standard:

UL62368, UL1310
 IEC / En62368, IEC / EN61558,
 IEC / EN60335, IEC / EN61347
 FCC PART15 CLASS B

EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YSF5-2 (Design for CATV)



Rated Power: 6W
 Input: 100-240V AC 47-63Hz
 Standby Power: <0.075W
 Efficiency Level: COCV5
 Protection: Short Circuit, OCP, OVP
 Output: 12-24V

Output Voltage (DC)	12V	24V
Output Current (max.)	0.45A	0.2A

Dimensions: (mm)

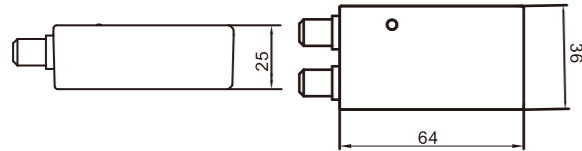

Safety Standard:

IEC / EN62368-1
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YSF7 (Design for CATV)



Rated Power: 6W
 Input: 100-240V AC, 47-63Hz
 Standby Power: <0.075W
 Efficiency Level: COCV5
 Protection: Short Circuit, OCP, OVP
 Output: 12-24V

Output Voltage (DC)	12V	24V
Output Current (max.)	0.45A	0.2A

Dimensions: (mm)

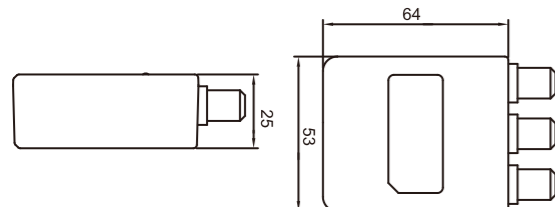

Safety Standard:

IEC / EN62368-1
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YS80-F (Design for CATV)



Rated Power: 80W
 Input: 100-240V AC, 47-63Hz
 Standby Power: <0.15W
 Efficiency Level: COCV5
 Protection: Short Circuit, OCP, OVP
 Output: 5-48V

Output Voltage (DC)	5V	12V	15V	19V	24V	48V
Output Current (max.)	10A	7A	6A	4.74A	3.75A	2A

Dimensions: (mm)

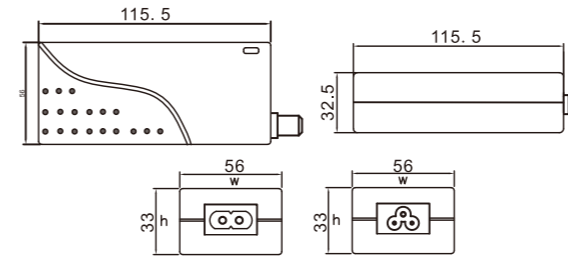

Safety standard:

UL623681-1
 IEC / EN 62368-1
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013
 FCC PART 15 CLASS B


Model: YS20-F (Design for CATV)



Rated Power: 20W
 Input: 100-240V AC, 47-63Hz
 Standby Power: <0.075W
 Efficiency Level: COCV5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	7.5V	9V	12V	15V	24V	36V
Output Current (max.)	3A	2.5A	2A	1.66A	1.25A	0.8A	0.5A

Dimensions: (mm)

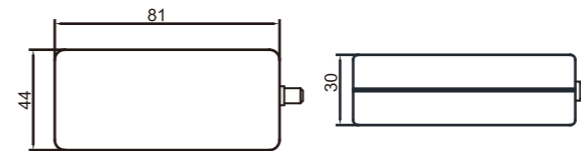

Safety Standard:

UL623681-1
 IEC / EN 62368-1
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013
 FCC PART 15 CLASS B


Model: YS18U-F (Design for CATV)



Rated Power: 24W
 Input: 100-240V AC, 47-63Hz
 Standby Power: <0.1W
 Efficiency Level: DOE VI
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	18V	24V	36V
Output Current (max.)	3A	3A	2.5A	2A	1.5A	1.2A	1A	0.6A

Dimensions: (mm)

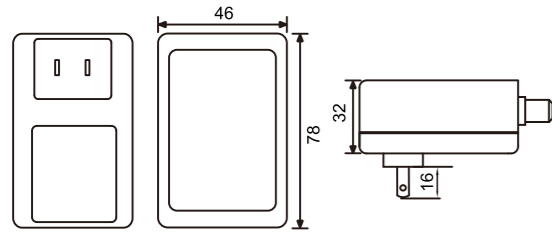

Safety Standard:

UL623681-1, CAN / CSA-C22.2
 UL1310, CAN / CSA- C22.2
 UL60601-1, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YS16U-F (Design for CATV)



Rated Power: 18W
 Input: 100-240V AC, 47-63Hz
 Standby Power: <0.1W
 Efficiency Level: DOE VI
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	24V	36V
Output Current (max.)	3A	2.5A	2A	1.65A	1.25A	0.75A	0.5A

Dimensions: (mm)

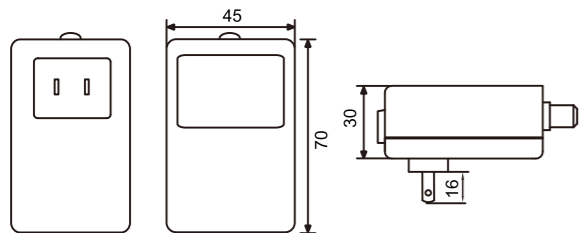

Safety Standard:

UL623681-1, CAN / CSA-C22.2
 UL1310, CAN / CSA- C22.2
 UL60601-1, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YS16E-F (Design for CATV)



Rated Power: 18W
 Input: 100-240V AC, 47-63Hz
 Standby Power: <0.075W
 Efficiency Level: COCV5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	24V	36V
Output Current (max.)	3A	2.5A	2A	1A	1.25A	0.75A	0.5A

Dimensions: (mm)

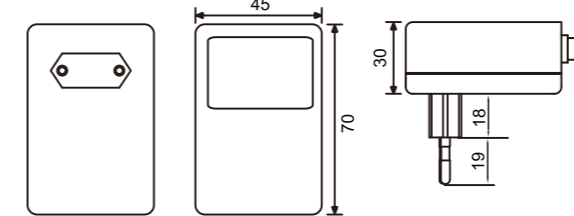

Safety Standard:

IEC / EN62368-1
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YS16B-F (Design for CATV)



Rated Power: 18W
 Input: 100-240V AC, 47-63Hz
 Standby Power: <0.075W
 Efficiency Level: COCV5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	24V	36V
Output Current (max.)	3A	2.5A	2A	1A	1.25A	0.75A	0.5A

Dimensions: (mm)

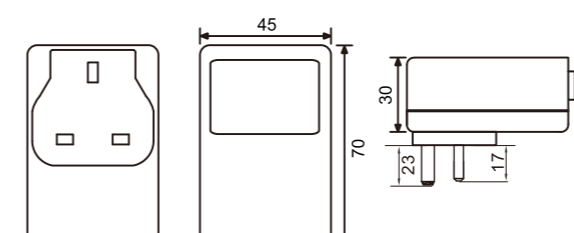

Safety Standard:

IEC / EN62368-1
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YS12E-F (Design for CATV)



Rated Power: 6W
 Input: 100-240V AC, 47-63Hz
 Standby Power: <0.075W
 Efficiency Level: COCV5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	24V	36V
Output Current (max.)	1.2A	1A	0.8A	0.6A	0.5A	0.25A	0.18A

Dimensions: (mm)

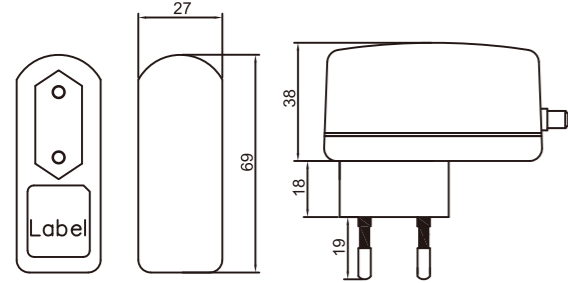

Safety Standard:

IEC / EN62368-1
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YS6E-F (Design for CATV)



Rated Power: 6W
 Input: 100-240V AC, 47-63Hz
 Standby Power: <0.075W
 Efficiency Level: COCV5
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	7.5V	9V	12V	24V	36V
Output Current (max.)	1.2A	1A	0.8A	0.6A	0.5A	0.25A	0.18A

Dimensions: (mm)

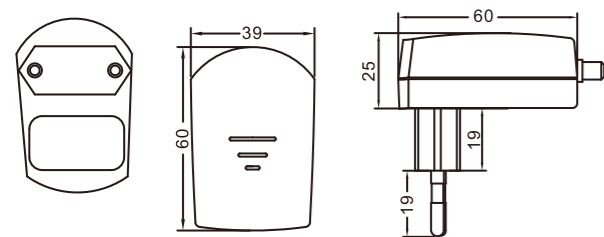

Safety Standard:

IEC / EN62368-1
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YL15E-F (Design for CATV)



Rated Power: 15W
 Input: 220-240V AC, 50Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	2.5A	2A	1.2A	1A	1A	0.75A	0.6A	0.4A

Dimensions: (mm)

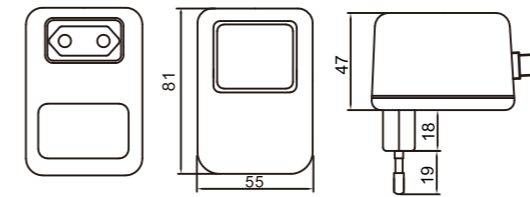

Safety Standard:

IEC / EN62368-1
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YL7F (Design for CATV)



Rated Power: 7W
 Input: 100-120V AC or 220-240V AC, 50-60Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 3-36V

Output Voltage (DC)	3V	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	1.5A	1A	1A	0.7A	0.5A	0.45A	0.35A	0.25A	0.2A

Dimensions: (mm)

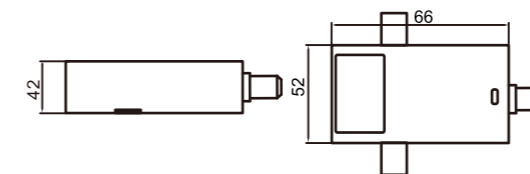

Safety Standard:

UL623681-1
 IEC / EN62368-1
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013
 FCC PART 15 CLASS B


Model: YL7U-F (Design for CATV)



Rated Power: 7W
 Input: 100-120V AC, 60Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 3-36V

Output Voltage (DC)	3V	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	1.5A	1A	1A	0.7A	0.5A	0.45A	0.35A	0.25A	0.2A

Dimensions: (mm)

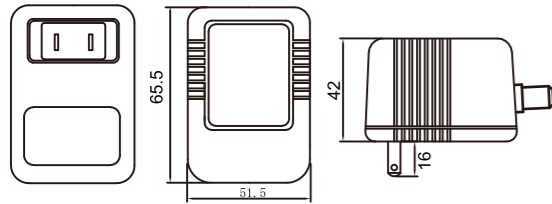

Safety Standard:

UL623681-1, CAN / CSA-C22.2
 UL1310, CAN / CSA- C22.2
 FCC PART 15 CLASS B


Model: YL7E-F (Design for CATV)



Rated Power: 7W
 Input: 220-240V AC, 50Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 3-36V

Output Voltage (DC)	3V	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	1.5A	1A	1A	0.7A	0.5A	0.45A	0.35A	0.25A	0.2A

Dimensions: (mm)

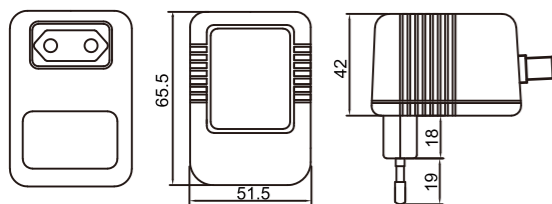

Safety Standard:

IEC / EN62368-1
 EN 55032: 2015
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013


Model: YS10-B



Rated Power: 6-12W
 Input: 220-240V AC, 50Hz
 Standby Power: <0.075W
 Efficiency Level: COCV5
 Protection: Short Circuit, OCP, OVP
 Output: 5V

Output Voltage (DC)	5V
Output Current (max.)	2.1A

Dimensions: (mm)

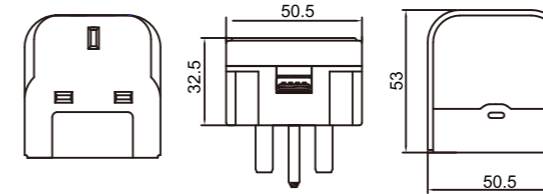

Safety Standard:

IEC / EN62368, IEC / EN61558, EN 61000-3-2: 2014
 IEC / EN60601, IEC / EN61347, EN 61000-3-3: 2013
 EN 55032: 2015, EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015, EN 61547: 2009


Model: YS6MC-B



Rated Power: 1-6W
 Input: 220-240V AC, 50Hz
 Standby Power: <0.075W
 Efficiency Level: COCV5
 Protection: Short Circuit, OCP, OVP
 Output: 5V

Output Voltage (DC)	5V
Output Current (max.)	1.2A

Dimensions: (mm)

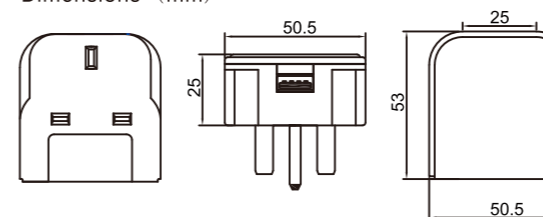

Safety Standard:

IEC / EN62368, IEC / EN61558, EN 61000-3-2: 2014
 IEC / EN60601, IEC / EN61347, EN 61000-3-3: 2013
 EN 55032: 2015, EN 55015: 2013+A1: 2015
 EN 55024: 2010+A1: 2015, EN 61547: 2009


Model: YS10 USB



Rated Power: 6-12W
Input: 220-240V AC, 50Hz
Standby Power: <0.075W
Efficiency Level: COCV5
Protection: Short Circuit, OCP, OVP
Output: 5V

Output Voltage (DC)	5V	
Output Current (max.)	1.2A	2.1A

Dimensions: (mm)

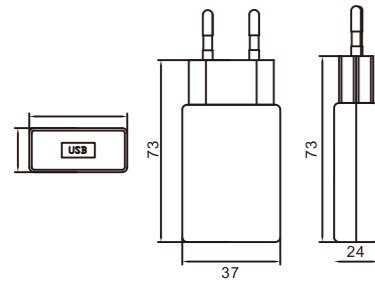

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60601, IEC / EN61347, EN 55032: 2015, EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 55015: 2013+A1: 2015, EN 61547: 2009


Model: YS10-A



Rated Power: 6-12W
Input: 220-240V AC, 50Hz
Standby Power: <0.075W
Efficiency Level: COCV5
Protection: Short Circuit, OCP, OVP
Output: 5V

Output Voltage (DC)	5V	
Output Current (max.)	1.2A	2.1A

Dimensions: (mm)

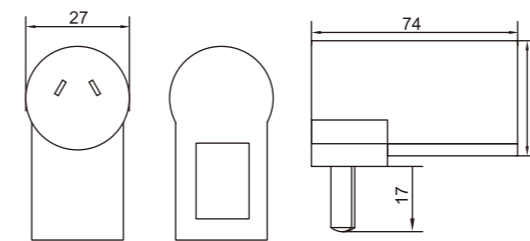

Safety Standard:

AS / NZS 61558.2.16: 2010
AS / NZS 61558.1: 2008


Model: YS10-U



Rated Power: 6-12W
Input: 100-120V, 60Hz
Standby Power: <0.075W
Efficiency Level: DOE VI
Protection: Short Circuit, OCP, OVP
Output: 5V

Output Voltage (DC)	5V	
Output Current (max.)	1.2A	2.1A

Dimensions: (mm)



Safety Standard:

UL623681-1, CAN / CSA-C22.2, UL1310, CAN / CSA-C22.2, UL60601-1, CAN / CSA-C22.2, FCC PART 15 CLASS B


Model: YS6MC USB



Rated Power: 1-6W
Input: 220-240V AC, 50Hz
Standby Power: <0.075W
Efficiency Level: COCV5
Protection: Short Circuit, OCP, OVP
Output: 5V

Output Voltage (DC)	5V	
Output Current (max.)	1.2A	

Dimensions: (mm)

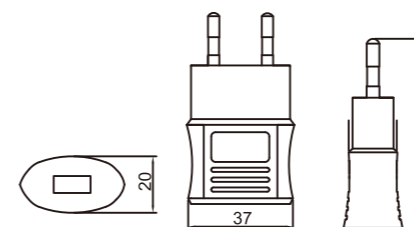

Safety Standard:

IEC / EN62368, IEC / EN61558, IEC / EN60601, IEC / EN61347, EN 55032: 2015, EN 55024: 2010+A1: 2015
EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 55015: 2013+A1: 2015, EN 61547: 2009


Model: YSP40



Rated Power: 36W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: <0.075W
 Efficiency Level: DOE VI
 Protection: Short Circuit, OCP, OVP
 Output: 12-55V
 Standard: IEEE802.3af / at
 Data Rate: 10 / 100 / 1000Mbps

Output Voltage (DC)	12V	24V	36V	48V	55V
Output Current (max.)	3A	1.5A	1A	0.75A	0.65A

Dimensions: (mm)

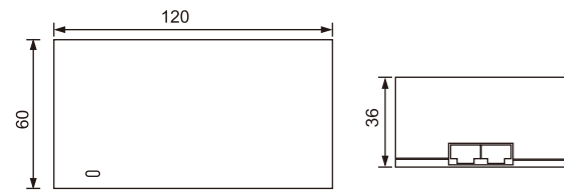

Safety Standard:

UL623681-1
 IEC / EN 62368-1
 EN 55032: 2015
 EN 55024: 2010+A1:2015

EN 61000-3-2: 2014
 EN 61000-3-3: 2013
 FCC PART 15 CLASS B


Model: YSP30



Rated Power: 24W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: <0.15W
 Efficiency Level: DOE VI / COCv5
 Protection: Short Circuit, OCP, OVP
 Output: 12-55V
 Standard: IEEE802.3af / at
 Data Rate: 10 / 100 / 1000Mbps

Output Voltage (DC)	12V	15V	24V	48V	55V
Output Current (max.)	2A	1.5A	1A	0.5A	0.43A

Dimensions: (mm)

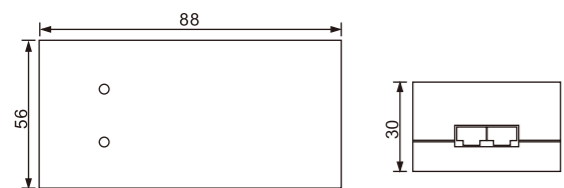

Safety Standard:

UL623681-1
 IEC / EN 62368-1
 EN 55032: 2015
 EN 55024: 2010+A1: 2015

EN 61000-3-2: 2014
 EN 61000-3-3: 2013
 FCC PART 15 CLASS B


Model: YSP12



Rated Power: 12W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: <0.15W
 Efficiency Level: DOE VI / COCv5
 Protection: Short Circuit, OCP, OVP
 Output: 12-55V
 Data rate: 10 / 100Mbps

Output Voltage (DC)	12V	15V	24V	48V	55V
Output Current (max.)	1A	0.8A	0.63A	0.31A	0.22A

Dimensions: (mm)

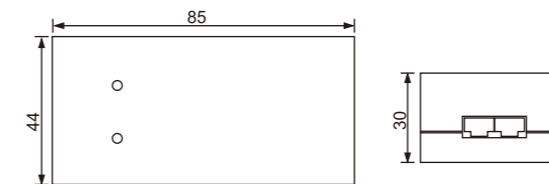

Safety Standard:

UL623681-1
 IEC / EN 62368-1
 EN 55032: 2015
 EN 55024: 2010+A1: 2015

EN 61000-3-2: 2014
 EN 61000-3-3: 2013
 FCC PART 15 CLASS B


Model: YSP18



Rated Power: 15W
 Input: 100-240V AC, 50 / 60Hz
 Standby Power: <0.075W
 Protection: Short Circuit, OCP, OVP
 Output: 12-55V
 Data rate: 10 / 100Mbps

Output Voltage (DC)	12V	15V	24V	48V	55V
Output Current (max.)	2A	1.6A	0.625A	0.5A	0.43A

Dimensions: (mm)

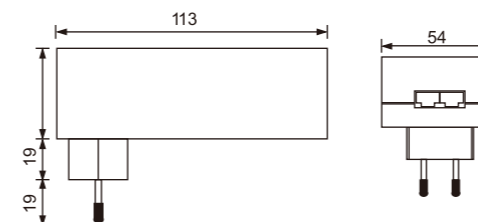

Safety Standard:

EN 62368-1
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013

UL1310, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YL60



Rated Power: 60W
 Input: 100-120V AC or 220-240V AC 50-60Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (AC/DC)	5V	7V	9V	12V	18V	24V	36V
Output Current (max.)	4A	3.5A	3.5A	3A	2A	1.5A	1A

Dimensions: (mm)

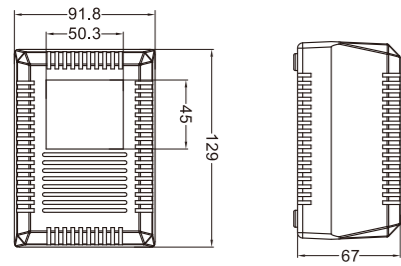

Safety Standard:

EN 62368-1
 EN 55024: 2010+A1: 2015
 EN 610000-3-2: 2014
 EN 61000-3-3: 2013
 UL1310, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YL24



Rated Power: 24W
 Input: 100-120V AC or 220-240V AC 50-60Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	3A	2.5A	2.3A	2A	1.5A	1.3A	1A	0.68A

Dimensions: (mm)

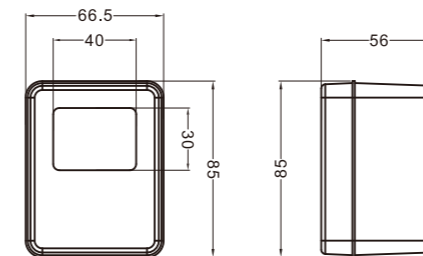

Safety Standard:

EN 62368-1
 EN 55024: 2010+A1: 2015
 EN 610000-3-2: 2014
 EN 61000-3-3: 2013
 UL1310, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YL45



Rated Power: 40W
 Input: 100-120V AC or 220-240V AC 50-60Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	5A	4.5A	4A	3A	2.5A	2A	1.5A	1A

Dimensions: (mm)

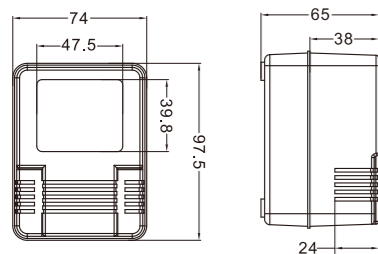

Safety Standard:

EN 62368-1
 EN 55024: 2010+A1: 2015
 EN 610000-3-2: 2014
 EN 61000-3-3: 2013
 UL1310, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YL15



Rated Power: 15W
 Input: 100-120V AC or 220-240V AC 50-60Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	2.5A	2A	1.2A	1A	1A	0.75A	0.6A	0.4A

Dimensions: (mm)

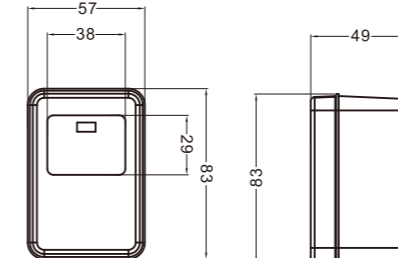

Safety Standard:

EN 62368-1
 EN 55024: 2010+A1: 2015
 EN 610000-3-2: 2014
 EN 61000-3-3: 2013
 UL1310, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YL15E



Rated Power: 15W
 Input: 220-240V AC, 50Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (AC/DC)	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	2.5A	2A	1.2A	1A	1A	0.75A	0.6A	0.4A

Dimensions: (mm)

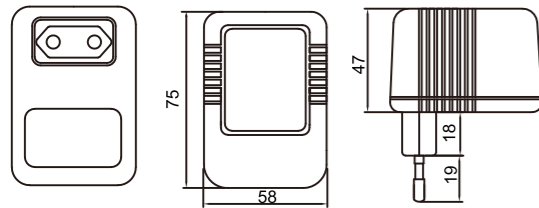

Safety Standard:

EN 62368-1
 EN 55024: 2010+A1: 2015
 EN 610000-3-2: 2014
 EN 61000-3-3: 2013


Model: YL15U



Rated Power: 15W
 Input: 100-120V AC 60Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (AC/DC)	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	2.5A	2A	1.2A	1A	1A	0.75A	0.6A	0.4A

Dimensions: (mm)

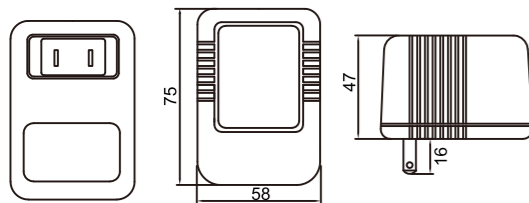

Safety Standard:

UL1310, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YL15B



Rated Power: 15W
 Input: 220-240V AC, 50Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	2.5A	2A	1.2A	1A	1A	0.75A	0.6A	0.4A

Dimensions: (mm)

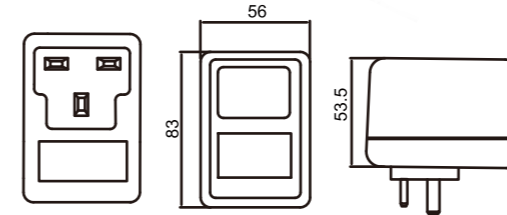

Safety Standard:

EN 62368-1
 EN 55024: 2010+A1: 2015
 EN 610000-3-2: 2014
 EN 61000-3-3: 2013


Model: YL15A



Rated Power: 15W
 Input: 220-240V AC, 50Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	2.5A	2A	1.2A	1A	1A	0.75A	0.6A	0.4A

Dimensions: (mm)

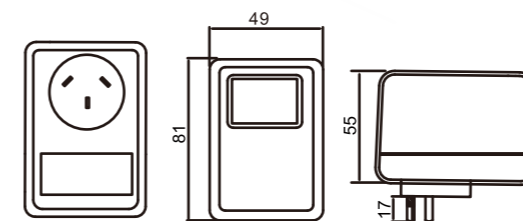

Safety Standard:

AS / NZS 61558.2.16: 2010
 AS / NZS 61558.1: 2008


Model: YL7U



Rated Power: 7W
 Input: 100-120V AC, 60Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 3-36V

Output Voltage (DC)	3V	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	1.5A	1A	1A	0.7A	0.5A	0.45A	0.35A	0.25A	0.2A

Dimensions: (mm)

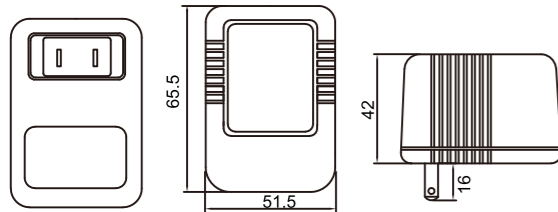

Safety Standard:

UL1310, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YL7E



Rated Power: 7W
 Input: 220-240V AC, 50Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 3-36V

Output Voltage (DC)	3V	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	1.5A	1A	1A	0.7A	0.5A	0.45A	0.35A	0.25A	0.2A

Dimensions: (mm)

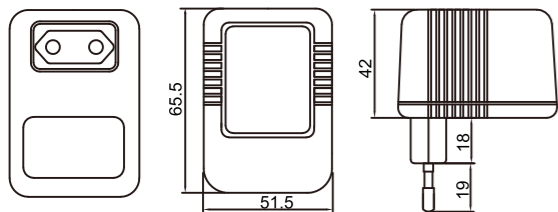

Safety Standard:

EN 60335 / 61558
 EN 55024: 2010+A1: 2015
 EN 610000-3-2: 2014
 EN 61000-3-3: 2013


Model: YL7B



Rated Power: 7W
 Input: 220-240V AC, 50Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 3-36V

Output Voltage (DC)	3V	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	1.5A	1A	1A	0.7A	0.5A	0.45A	0.35A	0.25A	0.2A

Dimensions: (mm)

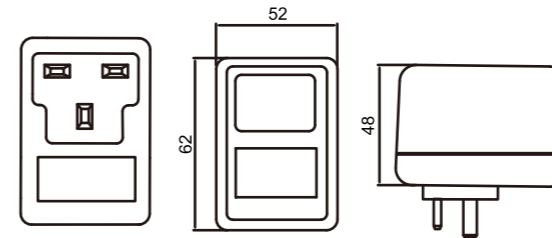

Safety Standard:

EN 60335 / 61558
 EN 55024: 2010+A1: 2015
 EN 610000-3-2: 2014
 EN 61000-3-3: 2013


Model: YL7A



Rated Power: 7W
 Input: 220-240V AC, 50Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 3-36V

Output Voltage (DC)	3V	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	1.5A	1A	1A	0.7A	0.5A	0.45A	0.35A	0.25A	0.2A

Dimensions: (mm)

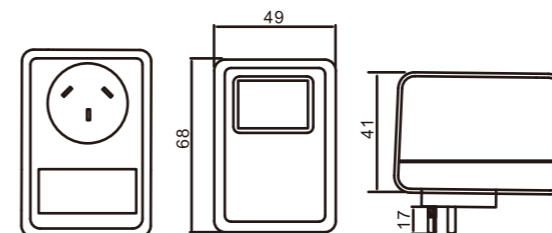

Safety Standard:

AS / NZS 61558.2.16: 2010
 AS / NZS 61558.1: 2008

Linear Power Adapters

YL3 Series


Model: YL3U



Rated Power: 3W
 Input: 100-120V AC, 60Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	400mA	350mA	250mA	200mA	200mA	150mA	120mA	80mA

Dimensions: (mm)

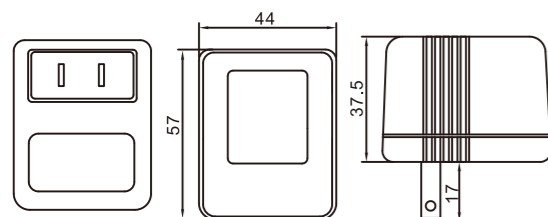

Safety Standard:

UL1310, CAN / CSA-C22.2
 FCC PART 15 CLASS B


Model: YL3E



Rated Power: 3W
 Input: 220-240V AC, 50Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	400mA	350mA	250mA	200mA	200mA	150mA	120mA	80mA

Dimensions: (mm)

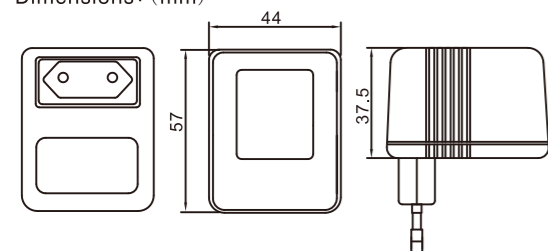

Safety Standard:

EN 60335
 EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013

Linear Power Adapters

YL3 Series


Model: YL3A



Rated Power: 3W
 Input: 220-240V AC, 50Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	400mA	350mA	250mA	200mA	200mA	150mA	120mA	80mA

Dimensions: (mm)

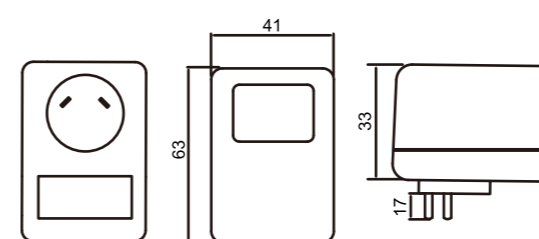

Safety Standard:

AS/NZS 61558.2.16: 2010
 AS/NZS 61558.1: 2008


Model: YL3B



Rated Power: 3W
 Input: 220-240V AC, 50Hz
 Efficiency Level: EuP
 Protection: Short Circuit, OCP, OVP
 Output: 5-36V

Output Voltage (DC)	5V	6V	9V	12V	15V	19V	24V	36V
Output Current (max.)	400mA	350mA	250mA	200mA	200mA	150mA	120mA	80mA

Dimensions: (mm)

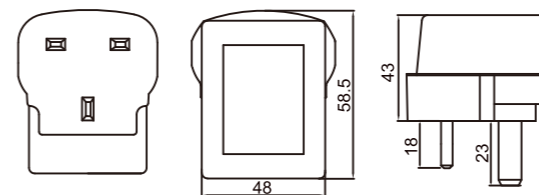

Safety Standard:

IEC / EN62368, IEC / EN61558
 IEC / EN60335, IEC / EN60601
 EN 55032: 2015

EN 55024: 2010+A1: 2015
 EN 61000-3-2: 2014
 EN 61000-3-3: 2013

Model: YC95 (Step Up)


CE RoHS



Rated Power: 90W
Input: 12V DC
Protection: Short Circuit, OCP, OVP
Output: 5-19V

Output Voltage (DC)	5V	7.5V	9V	12V	15V	16V	19V
Output Current (max.)	10A	8A	8A	6A	5A	5A	5A

Dimensions: (mm)

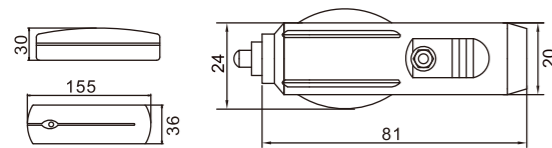

Safety Standard:
EN 50498: 2010

Model: YC15 USB


CE RoHS



Rated Power: 16W
Input: 12V DC
Protection: Short Circuit, OCP, OVP
Output: 12-24V / 5V

Output Voltage (DC)	12-24V	5V
Output Current (max.)	8A	3.1A

Dimensions: (mm)

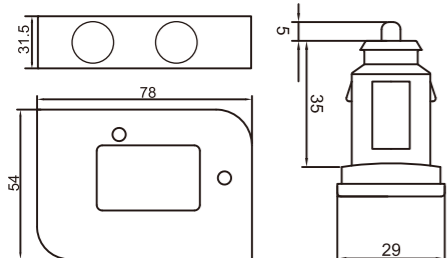

Safety Standard:
EN 50498: 2010

Model: YC16 USB


CE RoHS



Rated Power: 16W
Input: 12V DC
Protection: Short Circuit, OCP, OVP
Output: 5V

Output Voltage (DC)	5V	
Output Current (max.)	3.1A	2.1A

Dimensions: (mm)

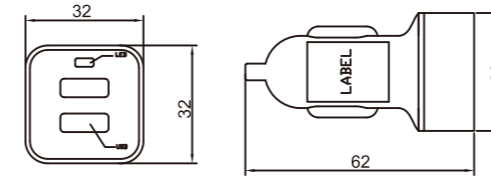

Safety Standard:
EN 50498: 2010

Model: YC6 USB


CE RoHS



Rated Power: 12W
Input: 12V DC
Protection: Short Circuit, OCP, OVP
Output: 5V

Output Voltage (DC)	5V	
Output Current (max.)	1.2A	2.1A

Dimensions: (mm)

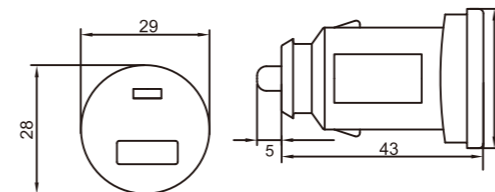


Safety Standard:
EN 50498: 2010



Model: YSL0150

Power: 90-150W
Input: 100~240V AC, 47~63Hz
Output Current: 6.5A max.
Dimensions: 185×68×35mm
PF>0.9



Model: YSL028

Power: 12-28W
Input: 100~240V AC, 47~63Hz
Output Current: 1A max.
Dimensions: 111×39.5×16mm



Model: YS032

Power: 12-32W
Input: 100~240V AC, 47~63Hz
Output Current: 2.5A max.
Dimensions: 105×61×27mm



Model: YS020

Power: 9-20W
Input: 100~240V AC, 47~63Hz
Output Current: 1.6A max.
Dimensions: 63.5×38.5×24mm



Model: YS05

Power: 2-5W
Input: 100~240V AC, 0.2A MAX 47~63Hz
Output Current: 1A max.
Dimensions: 924×3×20mm

Customized product only



Model :YTT600

Rated Power: 600W max
Input: 100-120V AC or 220-240V AC 50-60Hz
Output: 12-55V AC
Dimensions: 132*65mm
N.W. : 4.14kg



Model :YTT450

Rated Power: 450W max
Input: 100-120V AC or 220-240V AC 50-60Hz
Output: 12-55V AC
Dimensions: 125*62mm
N.W. : 3.12kg



Model: YTT200

Rated Power: 200W max
Input: 100-120V AC or 220-240V AC 50-60Hz
Output: 12-55V AC
Dimensions: 102*50mm
N.W. : 1.72kg



Model: YTT100

Rated Power: 100W max
Input: 100-120V AC or 220-240V AC 50-60Hz
Output: 12-55V AC
Dimensions: 93*39mm
N.W. : 0.97kg



Model: YTT60

Rated Power: 100W max
Input: 100-120V AC or 220-240V AC 50-60Hz
Output: 12-55V AC
Dimensions: 80*38mm
N.W. : 0.69kg



Model: Y75 series

Rated Power: 75W max.
 Input: 220-240V AC or 100-120V AC
 Frequency: 50Hz / 60Hz
 Output Voltage: 5V 6V 9V 12V 15V 19V 24V 36V
 Dimension: 76×25mm
 N.W.: 1270g



Model: Y40 series

Rated Power: 40W max.
 Input: 220-240V AC or 100-120V AC
 Frequency: 50Hz / 60Hz
 Output Voltage :5V 6V 9V 12V 15V 19V 24V 36V
 Dimension: 76×25mm
 N.W.: 1270g



Model: Y20 series

Rated Power: 20W max.
 Input: 220-240V AC or 100-120V AC
 Frequency: 50Hz / 60Hz
 Output Voltage: 5V 6V 9V 12V 15V 19V 24V 36V
 Dimension: 19×30mm
 N.W.: 600g



Model: Y12 series

Rated Power: 12W max.
 Input: 220-240V AC or 100-120V AC
 Frequency: 50Hz / 60Hz
 Output Voltage: 5V 6V 9V 12V 15V 19V 24V 36V
 Dimension: 16×24mm
 N.W.: 380g



Model: Y5 series

Rated Power: 5W max.
 Input: 220-240V AC or 100-120V AC
 Frequency: 50Hz / 60Hz
 Output Voltage: 5V 6V 9V 12V 15V 19V 24V 36V
 Dimension: 13×20mm
 N.W.: 230g




EE16



EE19



EE22




EE25(4+4pin)




EE28



UU10.5



PQ3230



EFD25(4+4pin)



EI28




EC28



EI30



EC39



EM12.7



UF9.8





EE25(5+5pin)





PQ2620

AC Power Cords



USA/Japan/China

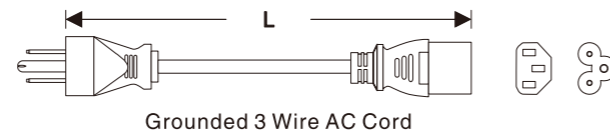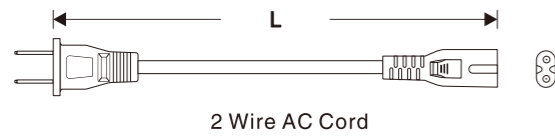



Europe

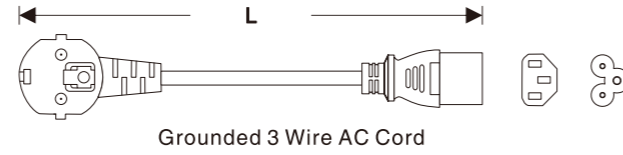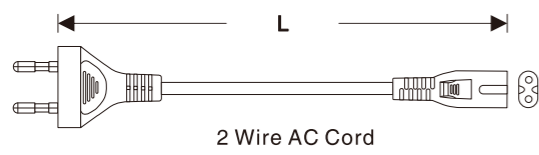



Australia/New Zealand

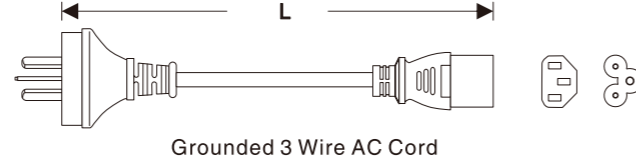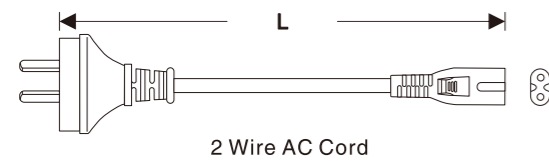

UK/Hongkong

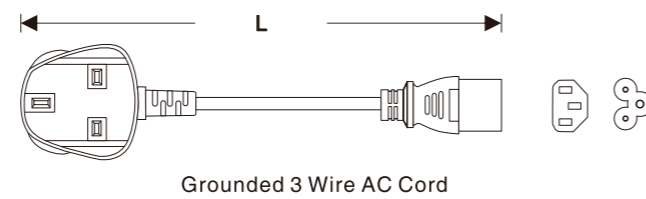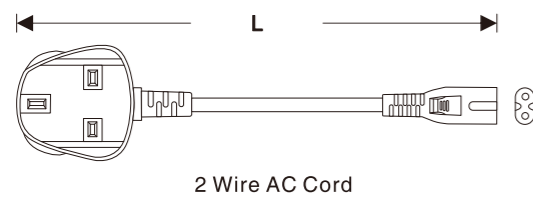

South Africa

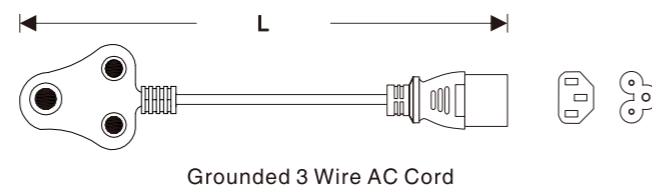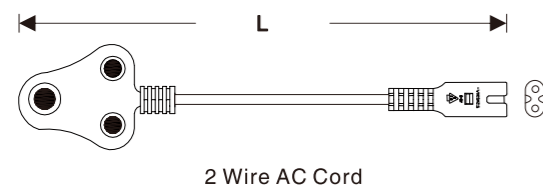

NOTE: "L" Length based on customer requirements
All cords are certified to their safety approval respectively

DC Connectors / Plugs

Strip & Tined

Specification: NC




Barrel Type (male/female)

Specification: 5.5 X 2.1 5.5 X 2.5 4.75 X 1.7 4.0 X 1.7




3.5 X 1.35 2.35 X 0.7 3.0 X 1.1 6.3 X 3.0 7.4 X 5.0 7.9 X 5.5



Barrel Type Right Angle

Specification: 5.5 X 2.1 5.5 X 2.5 4.75 X 1.7 4.0 X 1.7


3.5 X 1.35 2.35 X 0.7 6.3 X 3.0 6.5 X 1.4



Din (male)


Specification: 3Pin 4Pin 5Pin(180) 5Pin(240)

6Pin 7Pin 8Pin

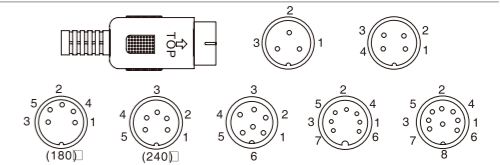


Mini Din (male)


3Pin (Molding)




4Pin (Molding)



3Pin (Assembly/Lock Type)




4Pin (Assembly/Lock Type)




Interchangeable Connector


2Pin





2Pin



3Pin




Rj11 / RJ45 Plug




DC Jack with Screw

Specification: A:5.5, B2.1, C7.5

A:5.5, B2.1, C10.1




12V Automotive




Micro USB / USB Type C



Splitter Cord



1 to 4 Way Splitter Cord



1 to 8 Way Splitter Cord

Workshops & Equipments



Automatic Injection
Molding Workshop



SMT Workshop



Automatic Transformer
Assembling Lines

EMC Lab



Testing & Verification Center



Automatic Encapsulating Lines



DIP Workshop



Automatic Burn-in Test Workshop